

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

CERTIFICATE OF EXPRESS MAILING

I hereby certify that this paper and the documents and/or fees referred to as attached therein are being deposited with the United States Postal Service on September 3, 1999 in an envelope as "Express Mail Post Office to Addressee" service under 37 CFR §1.10, Mailing Label Number **EL283840567US**, addressed to the Assistant Commissioner for Patents, Washington, DC 20231.

Jennifer Gross

Attorney Docket No.: APL1P193/P2369

First Named Inventor: LAM



UTILITY PATENT APPLICATION TRANSMITTAL (37 CFR. § 1.53(b))
(Regular application claiming priority of a provisional)

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

☐ Duplicate for
fee processing

Sir: This is a request for filing a patent application under 37 CFR. § 1.53(b) in the name of inventors:
Lawrence LAM, Jory BELL, Chris J. STRINGER and Roy RICCOMINI

For: DISPLAY HOUSING FOR COMPUTING DEVICE

Priority of U.S. Provisional Application No. 60/134,082 filed on May 14, 1999 is claimed under 35 U.S.C. § 119(e).

Application Elements:

- ☒ 44 Pages of Specification, Claims and Abstract
- ☒ 15 Sheets of informal Drawings
- ☒ 03 Combined Declaration and Power of Attorney
- ☐ Separate Declaration

Accompanying Application Parts:

- ☒ Assignment and Assignment Recordation Cover Sheet (recording fee of \$40.00 enclosed)
- ☐ Separate Power of Attorney by Assignee
- ☐ 37 CFR 3.73(b) Statement by Assignee
- ☐ Information Disclosure Statement with Form PTO-1449
- ☐ Copies of IDS Citations
- ☐ Preliminary Amendment
- ☒ Return Receipt Postcard
- ☐ Small Entity Statement(s)
- ☐ Other:

Claim For Foreign Priority

☐ Priority of _____ Application No. _____ filed on _____
_____ is claimed under 35 U.S.C. § 119.

☐ The certified copy is enclosed.

☐ The certified copy will follow.

☐ Amend the specification by inserting before the first line the sentence:

“This application claims the benefit of U.S. Provisional Application No. _____
filed on _____, the disclosure of which is incorporated herein by reference.”

Fee Calculation (37 CFR § 1.16)

	(Col. 1)	(Col. 2)	SMALL ENTITY	OR	LARGE ENTITY	
	NO. FILED	NO. EXTRA	RATE	FEE	RATE	FEE
BASIC FEE			\$380	\$	OR	\$760 \$760.00
TOTAL CLAIMS	80	-20 = 60	x9 = \$		OR	x18 = \$1080.00
INDEP CLAIMS	09	-03 = 06	x39 = \$		OR	x78 = \$468.00
[] Multiple Dependent Claim Presented			\$130 = \$		OR	\$260 = \$
* If the difference in Col. 1 is less than zero, enter "0" in Col. 2.			Total \$		OR	Total \$2308.00

☒ Check No. 5639 in the amount of \$2348.00 is enclosed.

☒ The Commissioner is authorized to charge any fees beyond the amount enclosed which may be required, or to credit any overpayment, to Deposit Account No. 50-0388 (Order No. APL1P193).

General Authorization for Petition for Extension of Time (37 CFR §1.136)

☒ Applicants hereby make and generally authorize any Petitions for Extensions of Time as may be needed for any subsequent filings. The Commissioner is also authorized to charge any extension fees under 37 CFR §1.17 as may be needed to Deposit Account No. 50-0388 (Order No. APL1P193).

☒ Please send correspondence to the following address:

Customer Number 022434

BEYER & WEAVER, LLP
P.O. Box 61059
Palo Alto, CA 94306
Telephone (650) 493-2100
Fax (650) 493-2102



Date: 9/3/99

C. Douglass Thomas
C. Douglass Thomas
Registration No. 32,947

PATENT APPLICATION

DISPLAY HOUSING FOR COMPUTING DEVICE

Inventor(s):

1. Lawrence Lam
6313 Tucker Drive
San Jose, California 95129
Citizenship: USA
2. Jory Bell
801 Minnesota Street, #8
San Francisco, California 94107
Citizenship: USA
3. Chris J. Stringer
243 Olympian Way
Pacifica, California 94044
Citizenship: British
4. Roy Riccomini
12602 Cambridge Drive
Saratoga, California 95070
Citizenship: USA

Assignee: Apple Computer, Inc.

BEYER & WEAVER, LLP
P.O. Box 61059
Palo Alto, CA 94306
Telephone (650) 493-2100

DISPLAY HOUSING FOR COMPUTING DEVICE

CROSS-REFERENCE TO RELATED APPLICATIONS

5 This application claims the benefit of U.S. Provisional Application No. 60/134,082, entitled "DISPLAY HOUSING FOR COMPUTING DEVICE", and filed on May 14, 1999, the disclosure of which is incorporated herein by reference for all purposes. This application is also related to U.S. Application No. _____ (Atty.Dkt.No.: APL1P197) entitled "HOUSING FOR A
10 COMPUTING DEVICE", filed _____.

BACKGROUND OF THE INVENTION

1. Field of the Invention

 The present invention relates generally to computer system and, more
15 particularly, to improved features for housings of computer systems.

2. Description of the Related Art

 All computing devices, including portable computers and desktop
computers, have housings that enclose the components and circuitry of the
computing devices. Various design difficulties are presented as these housing
20 get more compact. These design difficulties are particularly acute for portable
computers where a lot of components are required to fit in small areas. The
difficulties are increased when the housings include complex shapes and
decorative features.

 Thus, there is a need for improved housings for computing devices.

25

SUMMARY OF THE INVENTION

 Broadly speaking, the invention relates to an improved housing for a
computing device. The improved housing can have one or more of the

following aspects. A first aspect of the invention pertains to a computer housing having a logo or other symbol that can be illuminated using light from the backside of a display panel. A second aspect of the invention pertains to a suspended frame that is able to support a display panel within a display housing.

5 A third aspect of the invention pertains to a computing device provided with an internal antenna. A fourth aspect of the invention pertains to a stiffener for a computer housing so as to increase the rigidity and strength of the computer housing. A fifth aspect of the invention pertains to illumination of design elements or features using light from the backside of a display panel. A sixth

10 aspect of the invention pertains to a lid for a computing device, such as a portable computer, that is provided with a translucent housing.

The invention can be implemented in numerous ways, including as an apparatus, a device, a method, and a computer system. Several embodiments of the invention are discussed below.

15 As a display apparatus, one embodiment of the invention includes: a light panel that produces light for a display screen; a frame supporting said light panel with dimensional stability; a housing having said frame attached thereto, substantial portions of said housing being translucent; and a cosmetic shield provided between said housing and said frame to mask said frame and said light

20 panel from being visible through the substantial portions of said housing being translucent.

As a display apparatus, another embodiment of the invention includes: a housing, substantial portions of said housing being translucent; a light panel provided within said housing, said light panel produces light for a display

25 screen; and a cosmetic shield provided between said housing and said light panel to mask said light panel from being visible through the substantial portions of said housing being translucent.

As a method for illuminating a predetermined design in a translucent housing using reflected light, one embodiment of the invention includes:

30 emitting light from a light panel in first and second directions; reflecting a portion of the light emitted in the second direction from a cosmetic shield, the

cosmetic shield being provided between the housing and the light panel;
 reflecting a portion of the light reflected from the cosmetic shield back towards
 the cosmetic shield using a reflecting surface; and passing a portion of the
 reflected light from the reflecting surface through an opening in the cosmetic
 shield having the predetermined design and then through a corresponding
 portion of the housing adjacent the opening in the cosmetic shield, thereby
 illuminating the predetermined design in the translucent housing.

As a portable computer, one embodiment of the invention includes: a
 hinge; and a housing having a display portion and a base portion, the display
 portion being attached to the base portion with said hinge, wherein the base
 portion includes at least a processor, and wherein the display portion includes at
 least a flat panel display, an outer shell, and a frame supporting said flat panel
 display with respect to said portable computer by way of said hinge.

As a display apparatus, one embodiment of the invention includes: a flat
 panel display that emits light in a forward direction and in a back direction when
 active; and an outer shell for providing a housing for at least a rear portion of
 said display apparatus, said outer shell including a transparent portion through
 which a portion of the light emitted by said flat panel display in the back
 direction is able to pass, thereby illuminating the transparent portion when said
 flat panel display is active.

As a housing for a computer device, one embodiment of the invention
 includes: a front shell; a back shell coupled to said front shell to produce said
 housing, electrical components for the computer device being internal to said
 housing; and a foam stiffener provided internal to said housing to substantially
 fill unused space internal to said housing, thereby providing stiffness to said
 housing.

As a stiffening system for providing distributed loading to a portable
 computer assembly, one embodiment of the invention includes: a computer
 housing, said computer housing including a first member and a second member,
 said second member being coupled to said first member to form a volume
 therebetween and wherein said first member and said second member when

coupled together form said computer housing; a stiffener, said stiffener being disposed between said first member and said second member of said computer housing, said stiffener being configured to substantially fill an unused portion of the volume between said first member and said second member wherein the
5 outer surfaces of said stiffener respectively conform to the inner surfaces of the first and second member.

As a computer system, one embodiment of the invention includes: an antenna, said antenna being configured to transmit or receive RF signals; and a computer housing, said computer housing being configured to enclose said
10 antenna such that said antenna is entirely contained internal to said computer housing and is operable while being internal to said computer housing without having to extend any portion of said antenna outside said computer housing.

As an antenna device for transmitting and receiving RF for use by a computer, one embodiment of the invention includes: an antenna cable having
15 first and second conductors; an outer conductor, said outer conductor being operatively coupled to said second conductor of said antenna cable; an inner conductor, said inner conductor being operatively coupled to said first conductor of said antenna cable; and an antenna housing, said antenna housing being disposed around the outer periphery of said outer conductor and said
20 inner conductor, and wherein said antenna housing maintains a fixed separation between said outer conductor and said antenna cable.

Other aspects and advantages of the invention will become apparent from the following detailed description, taken in conjunction with the accompanying drawings, illustrating by way of example the principles of the
25 invention.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention, together with further advantages thereof, may best be understood by reference to the following description taken in conjunction with the accompanying drawings in which:

5 FIG. 1 is a perspective diagram of a portable computer;

FIG. 2 illustrates a display apparatus according to one embodiment of the invention;

FIG. 3A is a diagram of an EMI shield according to one embodiment of the invention;

10 FIG. 3B is a diagram of a cosmetic shield according to one embodiment of the invention;

FIG. 4 is a diagram of a symbol illumination system according to one embodiment of the invention;

15 FIG. 5 is a flow diagram of design illumination processing according to one embodiment of the invention;

FIG. 6A is a top view of a suspended frame according to one embodiment of the invention;

FIG. 6B is a right side view of the suspended frame;

20 FIG. 7 is a view of a partial housing assembly according to one embodiment of the invention;

FIG. 8 is an internal view of a Liquid Crystal Display (LCD) display housing for a computer;

FIG. 9 is a diagram of an antenna according to one embodiment of the invention;

25 FIGs. 10A and 10B are cross-sectional drawings of a antenna pole according to one suitable embodiment;

FIG. 11A is a cross-sectional diagram of a conventional computer housing exhibiting excessive amounts of flexibility;

FIG. 11B is a cross-sectional diagram of the computer housing that includes a series of ridges (or inserts);

FIG. 12 is a diagram of a computer housing according to one embodiment of the invention;

5 FIG. 13 is a broken perspective view of a LCD display screen housing according to one embodiment of the invention;

FIG. 14A is a cross-sectional diagram of a display apparatus according to one embodiment of the invention;

10 FIG. 14B is a cross-sectional diagram of a display apparatus according to one embodiment of the invention;

FIG. 14C is a cross-sectional diagram of a display apparatus according to one embodiment of the invention; and

FIG. 14D is a cross-sectional diagram of a display apparatus according to one embodiment of the invention.

15

DETAILED DESCRIPTION OF THE INVENTION

The invention pertains to an improved housing for a computing device. More particularly, a first aspect of the invention pertains to a computer housing having a logo or other symbol that can be illuminated using light from the backside of a display panel. A second aspect of the invention pertains to a
20 suspended frame is able to support a display panel within a display housing. A third aspect of the invention pertains to a computing device provided with an internal antenna. A fourth aspect of the invention pertains to a stiffener for a computer housing so as to increase the rigidity and strength of the computer
25 housing. A fifth aspect of the invention pertains to illumination of design elements or features using light from the backside of a display panel. A sixth aspect of the invention pertains to a lid for a computing device, such as a portable computer, that is provided with a translucent housing.

Embodiments of the invention are discussed below with reference to FIGs. 1 – 14D. However, those skilled in the art will readily appreciate that the detailed description given herein with respect to these figures is for explanatory purposes as the invention extends beyond these limited embodiments.

5 FIG. 1 is a perspective diagram of a portable computer 100. The portable computer 100 includes a base 102 and a lid 104. The base 102 houses internally various integrated circuit chips and other circuitry to provide computing operations for the portable computer 100. The integrated circuit chips and other circuitry include a microprocessor, Read-Only Memory (ROM),
10 Random-Access Memory (RAM), a disk drive, a battery, and various input/output (I/O) support circuitry. The base 102 also includes a keyboard 106 that allows a user of the portable computer 100 to enter alphanumeric data. The base 102 also includes a track pad 108 and associated buttons 110 and 112. The track pad 108 is an input device for the portable computer 100 and generally
15 represents an input pointer device. The associated buttons 110 and 112 allow a user to make a selection with respect to a graphical user interface. Additionally, the base 102 includes a power switch 114 and miscellaneous switches 116.

 The lid 104 is coupled to the base 102 by way of a hinge mechanism (not shown). As such, the lid 104 can rotate into an open position or a closed
20 position with respect to the base 102. As illustrated in FIG. 1, the lid 104 is in the open position. The lid 104 contains a light emitting diode (LCD) display 118. The LCD display 118 is visible to a user of the portable computer 100 when the lid 104 is in the open position, such as illustrated in FIG. 1. The LCD display 118 is surrounded at a peripheral region by a bezel 120 that serves to
25 support the LCD display 118 in its assembled position within the lid 104. When the lid 104 is in a closed position, an outer surface 122 of the lid 104 is visible but the LCD display 118 and the bezel 120 are no longer visible to the user.

 According to a first aspect of the invention, a logo or other symbol provided on a housing can be illuminated using light from the backside of a
30 LCD panel. The light can be direct, reflected, or both. The illumination is provided by use of otherwise wasted light.

FIG. 2 illustrates a display apparatus 200 according to one embodiment of the invention. The display apparatus 200 illustrated in FIG. 2 represents an assembly diagram for the display apparatus 200.

The display apparatus 200 includes a translucent housing 202. The translucent housing 202 has an outer surface 204 and an inner surface 206. In one implementation, the translucent housing 202 is a lid of a portable computer, such as the lid 104 illustrated in FIG. 1. A cosmetic shield 208 is placed against the inner surface 206 of the translucent housing 202. The cosmetic shield 208 provides a uniform, clean look for the translucent housing 202 when viewed from the outer surface 204. In other words, the cosmetic shield 208 provides the uniform, clean look and masks out the undesirable appearance of other internal components to the display apparatus 200. A suspended frame 210 is connected to the translucent housing 202 at the inner surface 206. The suspended frame 210 typically affixes itself with respect to the translucent housing 202 at the periphery of the translucent housing 202. An EMI shield 212 can be placed within the suspended frame 210 or between the suspended frame 210 and the cosmetic shield 208. The EMI shield 212 is a metal sheet have a plurality of holes. A LCD panel 214 is affixed to the suspended frame 210. Hence, the suspended frame 210 operates to secure the position of the LCD panel 214 with respect to the translucent housing 202. The EMI shield 212 serves to block emissions from at least the back-side of the LCD panel 214. A bezel 216 provides a border around the edge of the front-side of the LCD panel 214 and typically attaches to a peripheral region of the translucent housing 202.

FIG. 3A is a diagram of an EMI shield 300 according to one embodiment of the invention. The EMI shield 300 represents an embodiment of the EMI shield 212 illustrated in FIG. 2. The EMI shield 300 includes a plurality of holes 302 which are typically provided in a predetermined pattern (e.g., grid pattern). Even though the EMI shield 300 includes a plurality of holes 302, when placed adjacent to one side of a LCD panel, the EMI shield is able to limit electromagnetic emissions from the display apparatus due to the back-side of the LCD panel. The EMI shield 300 also includes a solid region 304 through which there are no holes. In FIG. 3A, the solid region 304 is in the form of a symbol or

a company logo, such as an apple which is the company logo of Apple Computer, Inc. In general, the solid region 304 provides a reflection area that is utilized to provide symbol illumination as discussed in detail below. However, it should be noted that the solid region 304 need not have the same shape or configuration as the symbol to be illuminated. For example, the solid region 304 illustrated in FIG. 3A could be a square region that is at least as large as the symbol to be illuminated.

FIG. 3B is a diagram of a cosmetic shield 306 according to one embodiment of the invention. The cosmetic shield 306 can be formed from a variety of materials. For example, in one implementation, cosmetic shield 306 is a thin sheet of aluminum. Other suitable materials for the cosmetic shield 306 include, for example, paper or plastic. The cosmetic shield 306 can be any of a variety of different colors or multiple colors. Although the cosmetic shield 306 generally reflects light incident from the LCD panel, the cosmetic shield 306 also include an opening 308. The opening 308 corresponds to the symbol to be illuminated. The opening 308 provides an outlet for some of the light being reflected from the solid region 304 of the EMI shield 300 towards the cosmetic shield 306. Accordingly, the light passing through the opening 308 illuminates the logo or other symbol.

FIG. 4 is a diagram of a symbol illumination system 400 according to one embodiment of the invention. The symbol illumination system 400 operates to illuminate a symbol at a translucent portion of a housing using light provided by a display panel. The symbol illumination system 400 explains how a symbol is illuminated by a display apparatus, such as the display apparatus 200 illustrated in FIG. 2, according to one embodiment of the invention.

The symbol illumination system 400 includes a LCD panel 402. The LCD panel 402 emits light in a primary direction 404 as well as in a secondary direction 406. The primary direction 404 is associated with the direction towards a viewing side of the LCD panel 402. A user of the LCD panel 402 (or the computer to which the LCD panel 402 is associated) typically views a display screen from the viewing side of the LCD panel 402. The secondary

direction 406 represents light being emitted from the back-side of the LCD panel 402 towards the housing which supports the LCD panel 402. Generally, the second direction 406 is opposite the primary direction. The light being emitted in the secondary direction 406 then interacts with an EMI shield 408. The EMI shield 408 includes a plurality of holes through which light may pass. As an example, the EMI shield 408 can be constructed such as the EMI shield 300 illustrated in FIG. 3A. In any case, when the light emitted in the secondary direction 406 strikes the EMI shield 408 at one of the respective holes within the EMI shield 408, then such light 412 can pass through the EMI shield 408. On the other hand, the light emitted in the secondary direction that does not strike the EMI shield 408 at a hole (but instead a solid region), such light 410 is reflected back toward the LCD panel 402.

The light 412 that does pass through the EMI shield 408 next impinges upon a cosmetic shield 414. The light 412 striking the cosmetic shield 414 is reflected from the cosmetic shield 414 back towards the EMI shield 408 as reflected light 416. Thereafter, a portion of the reflected light 416 that reflects back to a solid region 417 (e.g., solid region 304) of the EMI shield 408 is then again reflected back from the solid region 417 of the EMI shield 408 towards the cosmetic shield 414 as twice reflected light 418. At least a portion of the twice reflected light 418 is directed to an opening 420 in the cosmetic shield 414. The portion of the twice reflected light passing through the opening 420 then passes through a translucent housing 422 to produce an illuminated image 424 at an outer surface of the translucent housing 422. More particularly, the opening 420 within the cosmetic shield 414 is configured in accordance with an image of the symbol to be illuminated. For example, when the opening 420 is formed such as the opening 308 in the cosmetic shield 306 illustrated in FIG. 3B, the illuminated image 424 at the outer surface of the translucent housing 422 would correspond to an illuminated apple symbol. However, as noted above, any graphic or symbol can be illuminated in this manner.

FIG. 5 is a flow diagram of design illumination processing 500 according to one embodiment of the invention. The design illumination processing 500 is, for example, performed by a symbol illumination system, such as the symbol

illumination system 400 illustrated in FIG. 4. Typically, the symbol illumination system would be provided on an electronic device having a display panel for displaying information to a user. The design illumination processing 500 enables a design (e.g., symbol, logo or other graphic) on a back surface of a housing for the display panel of the electronic device to be illuminated using reflected light from the light panel.

The design illumination processing 500 begins by emitting 502 light from a light panel in first and second directions. Typically, the first direction is a primary direction in which light is emitted from the light panel, and the second direction is a secondary in which light is also emitted. Typically, the amount of light emitted in the second direction is substantially less than the amount of light emitted in the first direction. Often, the light emitted in the second direction is a side-effect not normally desired (i.e., a side-effect) but such light is utilized by the invention.

Next, a portion of the light emitted in the second direction from the light panel is reflected 504 from a cosmetic shield. In other words, the light emitted in the second direction is reflected back in substantially the first direction by the cosmetic shield. Typically, the cosmetic shield reflects most of the light striking its surface, but some of the light can also be absorbed.

Then, a portion of the light reflected from the cosmetic shield is reflected 506 back towards the cosmetic shield using a reflecting surface. The reflecting surface can be provided in a number of ways, including as a reflecting material provided on a portion of a back surface of the light panel or an intermediate reflecting region provided between the cosmetic shield and the back surface of light panel. Examples of an intermediate reflecting region are the solid region 304 of the EMI shield 300 in FIG. 3A or the solid region 417 of the EMI shield 408 illustrated in FIG. 4.

Thereafter, a portion of the reflected light from the reflecting surface is passed 508 through an opening in the cosmetic shield having a predetermined design and then through a corresponding portion of an adjacent housing. In other words, light reflected from the cosmetic shield back to the reflecting

surface then back again towards the cosmetic shield will eventually have a portion thereof pass through the opening in the cosmetic shield. The opening in the cosmetic shield leads to a housing that is adjacent to the cosmetic shield.

Also, at least a portion of the housing adjacent the cosmetic shield is translucent.

5 Consequently, the light passing through the opening in the cosmetic shield also then passes through a corresponding portion of the (translucent) housing that is adjacent to the opening in the cosmetic shield, thereby illuminating the predetermined design in the housing. Once the design is illuminated, the design illumination processing 500 is then complete and ends.

10 The design being illuminated is located adjacent the opening in the cosmetic shield. As noted above, the design can be provided in the translucent portion of the housing adjacent the opening in the cosmetic shield. The design could also be provided by a separate design piece of translucent material that is inserted and affixed within an opening in the (translucent or non-translucent)
15 housing. In such case, the opening in the housing would be adjacent the opening in the cosmetic shield. Still further, a light pipe or light guide could direct the light to the design and thus not be adjacent the opening in the cosmetic shield.

According to a second aspect of the invention, a suspended frame is able
20 to support a LCD panel within a display housing with attachments being made at upper and lower peripheral surfaces. The suspended frame is particularly well suited for use with a translucent display housing.

FIG. 6A is a top view of a suspended frame 600 according to one embodiment of the invention. FIG. 6B is a right side view of the suspended
25 frame 600. The suspended frame 600 illustrated in FIG. 6A and FIG. 6B represents one embodiment for the suspended frame 210 illustrated in FIG. 2.

The suspended frame 600 includes an outer periphery 602 and an inner periphery 604 that form the frame. However, the suspended frame 600 could alternatively be a sheet which would provider greater support at the additional
30 manufacturing cost and additional weight. Typically, the suspended frame 600 is a metal structure, such as sheet metal. The suspended frame 600 is used to

support a LCD panel, such as the LCD panel 214 illustrated in FIG. 2. The suspended frame 600 includes a left side 606, a right side 608, a top side 610, and a bottom side 612. The left side 606 and the right side 608 have side edges 614 that extend outward at the outer periphery 602 of the left side 606 and the right side 608. Additionally, the bottom side 612 includes a bottom edge 616 that extends outward at the outer periphery 602 of the bottom side 612. In order to affix the LCD panel to the suspended frame 600, the suspended frame 600 includes holes 618 at the left side 606 and the right side 608. The top side 610 includes holes 620 and the bottom edge 616 includes holes 622. The holes 620 and 622 are used to affix or mount with respect to the suspended frame 600 as discussed below.

The suspended frame 600 then in turn mounts to a housing. For example, the housing can be the translucent housing (lid) 202 illustrated in FIG. 2. FIG. 7 is a view of a partial housing assembly 700 according to one embodiment of the invention. The partial housing assembly 700 illustrates the suspended frame 600 being affixed or attached to a housing 702. The housing 702 includes an inner surface 704 and an outer surface 705. At the periphery of the inner surface 704, an outer lip 706 is formed. The outer lip 706 typically extends around the periphery of the translucent housing 702. At a bottom side of the outer lip 706 a plurality of holes 708 are provided through the outer lip 706. The holes 708 through the bottom side of the outer lip 706 align with the holes 622 in the bottom edge 616 of the bottom side 612 of the suspended frame 600. By threading screws through the holes 708 and into the corresponding holes 622, the bottom side of the suspended frame 600 is affixed to the bottom side of the housing 702. The housing 702 also includes the plurality of tabs 710 at a top side of the housing 702. In one embodiment, the tabs 710 are constructed as part of the housing 702 and extend downward from the top side over the top side 610 of the suspended frame 600. The tabs 710 are used to affix or mount the top side 610 of the suspended frame 600 to the top side of the housing 702. Typically, screws would be threaded through openings 712 in the tabs 710 and through the corresponding holes 620 in the top side 610 of the suspended frame 600. It should be noted that in this embodiment,

the suspended frame 600 is coupled to the housing 702 only at the top side and at the bottom side near the periphery. As such, when the housing 702 is translucent, the outer surface 705 of the translucent housing provides a smooth, uniform appearance (without having visual detractors due to large numbers of screws, etc.) even though the suspended frame 600, as well as the LCD panel coupled thereto, are securely fastened to the translucent housing.

Still further, the suspended frame 600 is connected to a base housing (e.g., base 102 of FIG. 1) through a hinge mechanism (not shown). The housing 702 then, as noted above, attaches to the suspended frame 600. The LCD display (e.g., 214) attaches to the suspended frame 600. A bezel (e.g., bezel 120) couples to the housing 702 or the suspended frame 600. Hence, when the lid (e.g., lid 104) is assembled, the bezel and the housing sandwiches the suspended frame 600 and the LCD display. Another advantage of the suspended frame 600 is then that the functional components within the lid are able to be easily serviced, tested or assembled because the bezel and housing can be removed while leaving the LCD display operable and attached to the suspended frame 600 (as well as the hinge mechanism).

According to a third aspect of the invention, a portable computing device is provided with an internal antenna. In one embodiment, the antenna is internal to a computer housing (e.g., LCD display housing).

FIG. 8 is an internal view of a LCD display housing 800 for a computer. The LCD display housing 800 has a housing 802. The housing 802 has an outer surface 804 and an inner surface 806. Affixed to the inner surface of the housing 802 is a LCD display 808. The peripheral portion of the LCD display 808 and brackets used to affix the LCD display 808 to the inner surface 806 of the housing 802 can be cosmetically masked with a cosmetic frame 810. In one implementation, the cosmetic frame 810 is a thin sheet of aluminum. The cosmetic frame 810 is useful when the housing has translucent portions.

The housing 802 is also configured to enclose an antenna. The inner surface 806 of the housing 802 is also provided with recesses 812 and 813 for receiving the antenna. In one implementation, the recesses 812 and 813 are

configured to coincide with the shape of the antenna device so that the assembly of the antenna device to the inner surface 806 of the housing 802 is performed with ease (and likely without any need to otherwise adhere or fasten). In most instances, the antenna device is disposed at the outer perimeter of the inner surface 806 of the housing 802. For RF interference reasons, it is desirable to place the antenna as far away from metal surfaces within the housing 802, namely, the LCD display 808 and the brackets used to affix the LCD display 808 to the inner surface of the housing 802. Also, when the cosmetic shield 810 is provided and made of metal, it is also desirable to place the antenna as far from the cosmetic shield as practicable. Given the space constraints of the LCD display housing 800, the housing 802 generally conforms to the shape and size of the LCD display 808. However, to provide a separation gap 814, the housing 802 is provided with sufficient area on sides 816 and 818. The recesses 810 are thus provided on the sides 816 and 818 spaced the separation gap 814 from the nearest interfering metal surfaces. In one implementation, the separation gap 814 is 12 mm, but such separation is dependent on the mass of metal in the LED display housing.

FIG. 9 is a diagram of an antenna 900 according to one embodiment of the invention. The antenna 900 has a first antenna pole 902 and a second antenna pole 904. Both the first antenna pole 902 and the second antenna pole 904 are connected to antenna cables 906 and 908. When the antenna 900 is attached to the housing 802, the first antenna pole 902 fits into the recess 812 and the second antenna pole 904 fits into the recess 813. The antenna cable 908 couples the first and second antenna poles 902 and 904 together. When the antenna 900 is attached to the housing 802, the antenna cable 908 fits into a groove 820 in an upper peripheral portion of the inner surface 806 of the housing 802 (see FIG. 8). The antenna cable 906 is provided between the LCD display 808 and the inner surface 806 of the housing 802 and serves to electrically couple the antenna 900 to the computing device.

Although not shown in FIGs. 8 and 9, after the antenna 900 is attached to the housing 802, a bezel (not shown) is then attached to the housing 802 to provide a front surface to the housing 802. The attachment of the bezel serves

to complete the assembly of the housing 802. The attachment of the bezel can be facilitated by snaps 822 and 824 provided on the sides 816 and 818 respectively. In one implementation, the bezel is translucent and covers the cosmetic shield 810 as well as the more peripheral portions of the housing 802.

5 In such an implementation, the antenna 900 together with the recesses 812 and 813, the groove 820 and the snaps 824 all provide a generally uniform design line within the housing. As such, even when the housing (at least the peripheral portion) is translucent, the antenna is largely unnoticeable to the untrained observer from the exterior of the housing.

10 While the above embodiments refer to the use of a dipole antenna, a monopole antenna or other antenna designs could also be used. While the recesses and grooves in the inner surface of the housing serves to provide uniform design features in a translucent housing, if a non-translucent housing were used, such recesses and grooves would not be as important. It should also
15 be noted that to provide a sufficient separation gap 814, the sides 816 and 818 could be extended outward primarily only in the vicinity of the recesses 812 and 813 as opposed to the entire length of the sides 816 and 818.

The one or more antenna poles provided with the antenna can be formed in a variety of ways. FIGs. 10A and 10B are cross-sectional drawings of a
20 antenna pole 1010 according to one suitable embodiment. The antenna pole 1010 couples to a cable 1012 (e.g., coaxial cable) that has an inner conductor and an outer conductor (not shown). A dielectric material (not shown) is disposed between the inner conductor and the outer conductor. The antenna pole 1010 is used to transmit and receive information with respect to a
25 computing device associated with the antenna pole 1010. Typically, the cable has a distal end coupled to a portion of the antenna pole 1010 and a proximal end coupled to a circuit board or related device (e.g., transceiver) of the computing device. In one implementation, the cable 1012 is a coaxial cable. However, in general, the cable 1012 can be any suitable wiring having two
30 conductors.

In the embodiment shown in FIGs. 10A and 10B, the antenna pole 1010 includes a first conductor 1014 that is operatively coupled to the outer conductor at the distal end of cable 1012. The first conductor 1014 flares back around the outer peripheral surface of the cable 1012. In this manner, a

5 substantial portion of first conductor 1014 is disposed around the outer periphery of the cable 1012. In some situations, a gap 1016 is formed between the inner peripheral surface of the first conductor 1014 and the outer peripheral surface of the cable 1012 (as shown in the cross section C-C of FIG. 10B). In one implementation, the first conductor 1014 flares back about 23 mm in

10 length, and the gap 1016 is 0.3 to 0.4 mm. Typically, the first conductor 1014 is formed from a conductive metal (e.g., copper). Also, as shown in FIGs. 10A and 10B, the first conductor 1014 may be configured in two separate sections that are both flared back on opposite sides of the outer periphery of the cable 1012.

The antenna pole 1010 also includes a second conductor 1018 that is

15 operatively coupled to the inner conductor at the distal end of the cable 1012. The second conductor 1018 extends outward away from the distal end of the inner conductor of the cable 1012. In one implementation, the second conductor 1018 is preferably about 23 mm from the distal end of the inner conductor 1018. Typically, the second conductor 1018 is formed from a

20 conductive metal (e.g., copper). It should be noted that the first conductor 1014 and the second conductor 1018 may be integrally formed with the respective conductors of the cable 1010. In other words, the first conductor 1014 could be a portion of the outer conductor of the cable 1012, and the second conductor 1018 could be a portion of the inner conductor of the cable 1012.

25 The antenna pole 1010 has an antenna housing 1020 that is disposed around the first conductor 1014, the second conductor 1018, and a portion of the cable 1012. The antenna housing 1020 can be formed from a wide range of materials. By way of example, the antenna housing 1020 can be made of polycarbonate. In one implementation, the outer peripheral surface of first

30 conductor 1014 is adjacent to the inner peripheral surface of the antenna housing 1020. Additionally, in one embodiment, there can be a space 1022 between the inner peripheral surface of the antenna housing 1020 and the outer

peripheral surface of second conductor 1018. In such an embodiment having the space 1022, the antenna housing 1020 can also include a second conductor support member 1024 to support the second conductor (as shown in cross section D-D of FIG. 10B).

5 The antenna housing 1020 further includes a plurality of support members 1026 for supporting the cable 1012 line inside the antenna housing (as shown in cross section B-B of FIG. 10B). The supporting members 1026 can be separate pieces or integrally formed with the antenna housing 1020.

10 The antenna housing 1020 can be formed as a two-piece construction, including a first housing member 1028 and a second housing member 1030. In this case, the supporting members 1026 can be integrally formed with the first and second housing members 1028 and 1030. As shown, at the cross section B-B of FIG. 10B, the supporting members 1026 not only support the cable 1012 inside the antenna housing 1020 but also properly space the conductors 1014
15 apart from the cable 1020. With the two-piece construction, a first mating portion 1032 of the first housing member 1028 and a second mating portion 1034 of the second housing member 1030 are structurally coupled and held together with shrink tubing 1036 that surrounds a portion of the outer peripheral surface of the antenna housing 1020 (see cross section A-A of FIG. 10B).

20 There is an increasing trend in the computer industry, particular with respect to portable computers, to reduce size, weight and thickness. For the most part, any computer part that can be made smaller generally is made smaller to accommodate this need. By way of example, the wall thickness of the computer housing has been made thinner over the years. In most instances,
25 decreased wall thickness reduces the overall thickness and weight of the computer, both of which are desired to make a portable computer more portable.

30 However, making the outer structure thinner to reduce computer weight and thickness has its drawbacks, typically the enclosure becomes more flexible. As a general rule, thicker walls mean stronger walls. Consequently, the thinner outer structure may not offer enough support to protect the internal components

of the computer. Even when the thinner outer structure is strong enough to protect the internal components, users who expect rigid structures are unsatisfied.

Furthermore, recently, computer housing designs have become more decorative, thereby creating more complex shapes. These complex designs create structural problems that often result in even more flexible outer shells. Typically the complex shapes are contoured or curvilinear, which generally reduces the overall strength of the computer housing. The complex shapes also make it increasingly difficult to provide any internal support to offset these problems. For the most part, rectilinear designs, which include most of the computer housings on the market today, are stronger. The rectilinear design provides rigid support and is fairly easy to support with internal support members.

FIG. 11A is a cross-sectional diagram of a conventional computer housing 1110 exhibiting excessive amounts of flexibility. The computer housing 1110 includes a top member 1112 and a bottom member 1114. Typically, the top member 1112 is structurally coupled to bottom member 1114 wherein an open space or volume 1116 is created therebetween. For the most part, this volume contains the different parts or components of a computer or display (e.g., circuit boards, key boards, display screen, etc.). Although, there are things contained in the volume, a significant portion of the volume is left unused. If a flexible (non-rigid) material is used to form the top member or bottom member, then the volume will be left structurally unsupported. By way of example, when a force 1118 is supplied to the computer housing 1110 (i.e., outer shell) at a position away from its members sides, the computer housing 1110 will deform under the force 1118, creating a "feel" ("squishy feel") which is considered by users indicative of low quality. As a result of the deforming, the force 1118 can also damage the internal parts or components of the computer or display (e.g., display screen).

In general, there are two ways to design a housing structure, one is to have a strong outer shell, the other is to have an internal skeleton structure. As a

general rule, when the outer shell becomes increasingly thin (i.e., flexible) it is difficult to have a strong outer shell and therefore an internal support skeleton is usually provided to strengthen the thin outer shell. By way of example, ribs or inserts are typically used to increase the strength and rigidity of the outer shell.

FIG. 11B is a cross-sectional diagram of the computer housing 1110 that includes a series of ridges 20 (or inserts). Typically, the ridges 20 provides support to both the bottom member 1114 and the top member 1112 of the computer housing 1110. The ridges may be configured as part of one of the members 1112, 1114 or may act as a separate piece. Although, the computer housing 1110 (outer shell) is better supported and has more rigidity, the volume 1116 created by the top member 1112 and the bottom member 1114 still includes unused space. Hence, if force 1122 is applied to the surface of the top member 1112, then the unsupported space will deform (i.e., flexible), albeit less than without the ribs 1120. If force 1124 is applied to the surface of the top member 1112 at the rib 1120, then the surface on the opposing side of the rib 1120 receives a large portion of the force 1124 which may damage sensitive parts. For example, if the bottom member 1114 were a LCD display screen, then the rib 1120 may transfer the full force of the force 1124 to the LCD display screen, which may damage the LCD display screen.

According to a fourth aspect of the invention, a computer housing with a stiffener is provided. The stiffener is configured to increase the rigidity and strength of the computer housing, which advantageously allows the thickness of the computer housing walls to be decreased. Thus, the use of the stiffener not only protects internal components but also provides a firmer feel to the housing. The stiffener can have a large surface area and be positioned between the top member and the bottom member of a housing to distribute external loads (e.g., pressures, forces) more evenly across the entire housing. More specifically, the stiffener can be configured to conform to the internal features of the housing that oppose (or are adjacent to) the stiffener, thereby maximizing the load distribution. That is, the stiffener advantageously fills the unused volume of the housing. Furthermore, the stiffener is configured to work in housings that have complex shapes (e.g., curvilinear) thereby allowing more decorative housings.

Accordingly, the stiffener provides a non-traditional solution to a load distribution problem. Typically, the computer industry has always used ribs, inserts, a thick outer shell and/or rectilinear shapes to support the computer housing. For the most part, the computer industry has not filled unused volumes within the computer housing because of the additional weight.

FIG. 12 is a diagram of a computer housing 1210 according to one embodiment of the invention. The computer housing 1210 represents a housing used with a computing device such as a computer housing or cabinet or a display housing. The computer housing 1210 includes a first member 1212 and a second member 1214. Typically, the walls of each member 1212 and 1214 are thin and flexible. As mentioned above, the thin members 1212 and 1214 reduce the overall thickness and weight of the housing. The computer housing walls are typically formed from a plastic material such as polycarbonate (ABS). Normally, the first member 1212 is structurally coupled to the second member 1214 to form the outer shell of the housing 1210 and form a volume therein. Although the computer housing has been described as having a first and second members it should be noted that the computer housing may be integrally formed (e.g., one piece) or formed from a plurality of members (i.e., third member, fourth member, etc.).

Conventionally, the internal components or parts of the computer (e.g., printed circuit boards, LCD displays) are housed within the volume created within the housing 1210. However, in most situations, there remains a portion of the volume that is left unused (e.g., a void or open space). A stiffener 1226 is disposed within the housing 1210 to substantially fill any unused volume between the first and second members. Basically, the stiffener 1226 is configured to fill the unused volume (see FIG. 12). Moreover, the outer peripheral surface of the stiffener 1226 conforms to the shape of the adjacent components or inner peripheral surfaces of the first member and second member. The stiffener 1226 can be configured to provide clearance (or slots) for features such as connectors and wires. The stiffener 1226 can also include holes or openings (cavities) for internal components or parts. Additionally, the

stiffener 1226 may include protrusions and depressions that coincide with the shape (geometry) of the components, parts or housing within the volume.

Because the stiffener 1226 fills the unused volume of the housing, forces that exerted on the outer peripheral surface of the housing are distributed over a larger surface area. Basically, if force 1228 is applied to the external surface of first member 1212, the single point of contact will be distributed throughout the stiffener 1226. In essence, the combination of the first member 1212, second member 1214, internal components and stiffener 1226 form a laminate structure that provides resistance to point pressure loading.

Furthermore, the stiffener 1226 may be fastened to at least one of the members or be tightly disposed between the members and components. In one implementation, the stiffener 1226 is fastened to the first member 1212 using a stiffener lip (not shown). Basically, the lip can be an extension of the first member and is configured to hold the stiffener 1226 in place. The lip may also be used as a locating ridge for determining the correct placement of the stiffener 1226 with respect to the first member. In another implementation, the stiffener 1226 may be structurally coupled to the first member or the second member using an adhesive. In still other implementations, other techniques can be used to hold the stiffener 1226 in place (e.g., screws, rivets, etc.).

Generally, the stiffener 1226 does not completely or overly fill the unused volume. Instead, a gap is provided so that the stiffener will not exert unwanted pressure on the surface of one of the components or the members while in a static condition. By way of example, if the first member is an LCD display screen, the static pressure exerted on the back side of the LCD display screen may damage the LCD display screen.

In one embodiment, the stiffener 1226 should be formed from a material that can substantially be implemented in a portable computer environment (low flammability, low static charge, low weight, and low compressibility). In a preferred embodiment of this invention, the stiffener is formed from foam. Advantageously, many foam materials fall within the above criteria, especially the weight. The foam may be machined, molded, or die cut to the desired

shape. Preferably, packaging foam is used. As examples, the stiffener can be formed from polyurethane, expanded polystyrene, expanded polypropylene or expanded polyethylene. All of these examples are light weight, have compressible strength (substantially rigid) and are easily formed to different shapes. In any case, it should also be noted that the above description is not limiting and any material that is substantially rigid and lightweight (e.g., rubber, plastic, silicon) may be used.

In another embodiment of the invention, lightweight stiffening is provided for a portable computer housing. In this particular embodiment, the computer housing is a LCD display screen housing. FIG. 13 is a broken perspective view of a LCD display screen housing 1310 according to one embodiment of the invention. The LCD display screen housing 1310 includes a bezel (frame) 1312 and an LCD display screen 1314 that form a front portion of the LCD display housing 1310. The LCD display screen housing 1310 further includes a back portion 1316 of the LCD display screen housing 1310. The back portion 1316 provides an impact resistant shell for protecting the backside of the LCD display screen 1314. As shown, both the bezel 1312 and the LCD display screen housing 1310 have complex shapes (internal and external) as well as portions that are curvilinear (e.g., decorative design).

A foam stiffener 18 is disposed between the front portion and the back portion 1316 of the LCD display screen housing 1316. Additionally, the outer peripheral surfaces of the foam stiffener 1318 are configured to conform the inner peripheral surfaces of the front portion (e.g., the LCD display screen 1314 and perhaps the bezel 1312) and the back portion 1316 of the LCD display screen housing 1316. Furthermore, the foam stiffener 1318 can also include a depression 1320 for disposing a connector and a protrusion 1322 that fits into the backside of LCD display screen 1314, and an opening 1324 for lighting a portion of the LCD display screen housing 1316. As shown, the foam stiffener 1318 is advantageously configured to fill the complex shapes associated with the bezel 1312, the LCD display screen 1314, the LCD display screen housing 1316 and connectors. It should be noted that the foam stiffener 1318 is not limited by any one of the above arrangements (e.g., depressions, protrusions, openings) and

any combination thereof may be used. Moreover, all three structures (e.g., the front portion, the foam stiffener 1318 and the back portion 1316) form a laminate structure (when coupled together) for the LCD display screen housing 1310 that provides a rigid structure with a firm feel (not malleable or squishy) that is substantially resistant to point pressures.

In an alternate embodiment, the foam stiffener can be used as the entire computer housing and fabricated to fit all the parts and the components of the computer. To protect the outer peripheral surface of the foam, a coating can be applied over the outer surfaces to form a shell.

Although the foam stiffener 1318 has a one-piece construction, the foam stiffener 1318 can utilize multiple pieces. In another alternate embodiment, the foam may be injected into the housing to fill the unused volume between the front portion and the back portion.

In other embodiments, the foam stiffener can incorporate an antenna or an EMI shield. That is, an antenna or an EMI shield could be patterned onto or internal to the foam stiffener. In one implementation, the foam stiffener is primarily a foam as noted above but also could include copper and nickel to provide the antenna or the EMI shield.

Also, the foam stiffener is generally very light weight. Nevertheless to further reduce weight, the foam stiffener can include weight reducing apertures. These apertures (cavities or holes) are selected so as to reduce weight while maintaining rigidity. Such apertures may be patterned or randomly placed.

Furthermore, the foam stiffener provides for a firm feel to the computer housing assembly, which is particularly useful given the flexible nature of the increasingly thin-walled plastic products and the constraints of typical stiffening methods such as ribs or inserts. Increasingly thinner products means there is little room for ribs, while weight reduction efforts mean that traditional stiffening materials such as aluminum or mica are too heavy. The foam stiffener is very lightweight and can also be used to replace other functional and structural parts (sheet metal, plastics, etc.) and thus reduce cost, weight and parts count. The relatively soft nature of the foam stiffener acts as a load spreader which not only

reduces likelihood of damaging parts or components internal to the housing, but also increases the units ability to survive point source pressures on the housing. In fact, in a ball pressure test for a portable computer, the display screen apparatus 1310 according to the invention passed the test, while a display screen apparatus without the benefits of the invention failed the test.

According to a fifth aspect of the invention, a logo, symbol or other device provided on a housing can be illuminated using light from the backside of a LCD panel. The light can be direct, reflected, or both. The illumination is provided by use of otherwise wasted light. The fourth aspect is similar to the first aspect but relies less on reflected light and is perhaps better suited for a non-translucent housing.

FIG. 14A is a cross-sectional diagram of a display apparatus 1400 according to one embodiment of the invention. The display apparatus 1400 includes a display housing 1400 that contains a LCD display 1404. The LCD display 1404 has a front surface 1406 and a back surface 1408. When the LCD display 1404 is power-on, the LCD display 1404 emits light primarily from the front surface 1406 but also emits some light from the back surface 1408. The fifth aspect of the invention serves to make use of the light emitted from the back surface 1408 that would otherwise go unused and thus wasted. The display apparatus 1400 also includes a bezel 1410 and 1412 to frame out the front surface 1406 of the LCD display 1404 and provide a smooth, uniform front surface for the display housing 1402.

The display housing 1402 also includes a translucent portion 1414 through which the light from the back surface 1408 of the LCD display 1406 can pass so as illuminate the translucent portion. In one embodiment, the display housing 1402 is generally opaque but includes the translucent portion 1414 where the light is desired. For example, a symbol, logo or other device can be provided at the translucent portion 1414 to be illuminated when the LCD display 1406 is powered-on. The translucent portion 1414 can be formed into the display housing 1402. Alternatively, an opening or hole can be provided in

the display housing 1402 and a translucent plug or insert can be provided in the opening or hole.

Thus, the fifth aspect of the invention allow for the illumination of design elements or features. The fifth aspect of the invention also serves to provide a visual indication of whether the LCD panel is on. When a computer system utilizing the display apparatus 1400 enters a sleep mode, the LCD panel is typically power-off so that light is not emitted from the LCD display 1406 and thus the illumination of the design element or feature stops. A user is thereby informed that the computer system is in the sleep mode when there is no illumination of the design element or feature. Another advantage of the fifth aspect is that it requires very little space between the back surface 1408 and the inside surface of the display housing 1402. Still another advantage of the invention is that the illumination is provided without requiring any additional power because the light used is otherwise wasted.

The display housing 1400 shown in FIG. 14A has a curved cross-section for industrial design considerations, namely for better user appeal. However, the display housing 1400 can take a variety of different forms.

FIG. 14B is a cross-sectional diagram of a display apparatus 1420 according to one embodiment of the invention. Although the display apparatus 1420 is similar to the display apparatus 1400 of FIG. 14A, the display apparatus 1420 includes a light diffuser 1422. As shown in FIG. 14B, the light diffuser 1422 is provided on an inner surface of the display housing 1402 at the translucent portion 1414. More generally, the light diffuser 1422 can be provided any where between the back side 1408 of the LCD display 1404 and the outer surface of the housing display 1402 at the translucent portion 1414.

The light diffuser 1422 operates to enable control of intensity and color of the illumination at the translucent portion 1414. In one embodiment, the light diffuser 1422 is a label. The light diffuser 1422 can have a graphic printed thereon, can have multiple colors, and can use varying thickness all to assist with the control over the intensity and color of the illumination provided. For example, the material for the light diffuser 1422 can be general label stock,

Mylar, Lexan (from General Electric) or any other material that is thin and translucent. Particular graphics or color shades can be printed on the light diffuser 1422 if desired.

The ability to control the light intensity of the illumination is useful to
 5 normalize the illumination yielded by difference vendors of the LCD displays. For example, in a LCD display from a first vendor emits light at a first intensity from its back surface and a LCD display from a second vendor emits light at a second intensity (which is greater than the first intensity) from its back side, then the illuminated logo, symbol or device would appear brighter in the display
 10 housing using the LCD display from the second vendor. Hence, the light diffuser 1422 can be used to normalize the intensity of the illumination provided. For example, the thickness of the light diffuser 1422 (label) used with the display housing using the LCD display from the second vendor can be increased (as compared to the thickness used with the display housing using the
 15 LCD display from the first vendor) to thus reduce its translucency.

FIG. 14C is a cross-sectional diagram of a display apparatus 1440 according to one embodiment of the invention. Although the display apparatus 1440 is similar to the display apparatus 1420 of FIG. 14B, the display apparatus 1440 further includes an illuminated area 1442 in the bezel 1412 and a light
 20 guide 1444. As shown in FIG. 14B, the light guide 1444 has a first end 1446 that receives a portion of the light emitted from the back surface 1048 of the LCD display 1404. The light received by the first end 1446 is then directed through the light guide 1444 and output at a second end 1448. The second ends 1448 is coupled to the illuminated area 1442 so that the light directed
 25 through the light guide 1444 is coupled to the illuminated area 1442, thereby illuminating the illuminated area 1442.

FIG. 14D is a cross-sectional diagram of a display apparatus 1460 according to one embodiment of the invention. Although the display apparatus 1460 is similar to the display apparatus 1420 of FIG. 14B, the display apparatus
 30 1460 further includes a foam insert 1462 to stiffen the display apparatus 1460. The foam insert 1462 conforms to the space between the back surface 1408 of

the LCD display 1404 and the inner surface of the display housing 1402. In one embodiment, the foam insert 1462 is a piece of foam such as discussed above with respect to the fourth aspect of the invention. As shown in FIG. 14D, to permit a portion of the light emitted from the back surface 1408 from reaching the light diffuser 1422 as well as the translucent portion 1414, the foam insert 1462 includes an opening 1464. The opening 1464 provides a light path from the back surface 1408 of the LCD display 1408 and the translucent portion 1414 of the display housing 1402.

According to a sixth aspect of the invention, a lid for a computing device, such as a portable computer, is provided with a translucent housing yet offers an appealing aesthetic look without being hampered by components internal to the housing. Aesthetic appearance can be improved by using cosmetic shields.

- 5 Translucent housings and cosmetic shields have been described above.

CLAIMS

1. A display apparatus, comprising:
 - a light panel that produces light for a display screen;
 - 5 a frame supporting said light panel with dimensional stability;
 - a housing having said frame attached thereto, substantial portions of said housing being translucent; and
 - a cosmetic shield provided between said housing and said frame to mask said frame and said light panel from being visible through the substantial
 - 10 portions of said housing being translucent.
2. A display apparatus as recited in claim 1, wherein said display apparatus is lid of a portable computer.
- 15 3. A display apparatus as recited in claim 1, wherein said light panel is a Liquid Crystal Display (LCD) panel.
4. A display apparatus as recited in claim 1, wherein the substantial portions of said housing are formed from a polycarbonate material.
- 20 5. A display apparatus as recited in claim 1, wherein said housing lacks uniform ribs.
6. A display apparatus as recited in claim 1, wherein said display apparatus
- 25 further comprises:
 - an Electro Magnetic Interference (EMI) shield provided with or adjacent said frame.

7. A display apparatus as recited in claim 6, wherein said EMI shield includes a plurality of openings.

5 8. A display apparatus as recited in claim 1, wherein said frame attached to said housing at a peripheral portion of said housing.

9. A display apparatus as recited in claim 1, wherein said frame is metal.

10 10. A display apparatus as recited in claim 9, wherein the substantial portions of said housing are formed from a polycarbonate material.

11. A display apparatus as recited in claim 10, wherein said frame attached to said housing at a peripheral portion of said housing using connectors such that
15 the connectors are not visible through said housing.

12. A display apparatus as recited in claim 11, wherein an upper portion of said frame affixes to an upper peripheral portion of said housing using a plurality of tongues formed on the upper peripheral portion of said housing.

20

13. A display apparatus as recited in claim 12, wherein a lower portion of said frame affixes to a lower peripheral portion of said housing using a plurality of screws inserted parallel to a primary surface of said

14. A display apparatus as recited in claim 1,
wherein said display apparatus further comprises:

an Electro Magnetic Interference (EMI) shield provided with or
adjacent said frame, said EMI shield including a reflection region where the
opening are not present, and

wherein said cosmetic shield including a cosmetic shield opening, the
cosmetic shield opening being positioned across from the reflection region of
said EMI shield.

15. A display apparatus as recited in claim 14, wherein the cosmetic shield
opening pertains to a predetermined design.

16. A display apparatus as recited in claim 15, wherein the predetermined
design is a symbol.

17. A display apparatus as recited in claim 15, wherein at least a portion of
light from said light panel that reflects from the reflection region of said EMI
shield produces an illuminated design on said housing when said light panel is
active, the illuminated design corresponds to the predetermined design.

18. A display apparatus as recited in claim 17, wherein the predetermined
design is a logo.

19. A display apparatus, comprising:
a housing, substantial portions of said housing being translucent;
a light panel provided within said housing, said light panel produces light
for a display screen; and

a cosmetic shield provided between said housing and said light panel to mask said light panel from being visible through the substantial portions of said housing being translucent.

5 20. A display apparatus as recited in claim 19,

wherein said display apparatus further comprises:

an Electro Magnetic Interference (EMI) shield provided between said light panel and said cosmetic shield, said EMI shield including a plurality of openings and a reflection region where openings are not present, and

10 wherein said cosmetic shield including a cosmetic shield opening, the cosmetic shield opening being positioned across from the reflection region of said EMI shield.

21. A display apparatus as recited in claim 20, wherein the cosmetic shield opening pertains to a predetermined design.

22. A display apparatus as recited in claim 21, wherein the predetermined design is a symbol.

20 23. A display apparatus as recited in claim 20, wherein at least a portion of light from said light panel that reflects from the reflection region of said EMI shield produces an illuminated design on said housing when said light panel is active, the illuminated design corresponds to the predetermined design.

25 24. A display apparatus as recited in claim 23, wherein the predetermined design is a logo.

25. A display apparatus as recited in claim 20, wherein said display apparatus is lid of a portable computer.

26. A display apparatus as recited in claim 25, wherein said light panel is a
5 Liquid Crystal Display (LCD) panel.

27. A display apparatus as recited in claim 26, wherein the substantial portions of said housing are formed from a polycarbonate material.

10 28. A method for illuminating a predetermined design in a translucent housing using reflected light, said method comprising:

emitting light from a light panel in first and second directions;

reflecting a portion of the light emitted in the second direction from a cosmetic shield, the cosmetic shield being provided between the housing and
15 the light panel;

reflecting a portion of the light reflected from the cosmetic shield back towards the cosmetic shield using a reflecting surface; and

passing a portion of the reflected light from the reflecting surface through an opening in the cosmetic shield having the predetermined design and then
20 through a corresponding portion of the housing adjacent the opening in the cosmetic shield, thereby illuminating the predetermined design in the translucent housing.

29. A method as recited in claim 28, wherein the predetermined design is a
25 logo.

30. A method as recited in claim 28, wherein the reflecting surface is provided by a portion of a EMI shield provided between the light panel and the cosmetic shield, the EMI shield includes openings that pass through substantial amounts of light yet provides electro-magnetic shielding, the openings are not
5 provided in the portion of the EMI shield providing the reflecting surface.

31. A portable computer, comprising:
a hinge; and
a housing having a display portion and a base portion, the display portion
10 being attached to the base portion with said hinge,
wherein the base portion includes at least a processor, and
wherein the display portion includes at least a flat panel display, an outer shell, and a frame supporting said flat panel display with respect to said portable computer by way of said hinge.

32. A portable computer as recited in claim 31, wherein said frame is metal.

33. A portable computer as recited in claim 31, wherein said outer shell is attached to said frame.

34. A display apparatus as recited in claim 31, wherein said flat panel display is a Liquid Crystal Display (LCD) panel.

35. A display apparatus as recited in claim 31, wherein the substantial
25 portions of said housing are formed from a polycarbonate material.

36. A display apparatus as recited in claim 31, wherein said housing lacks uniform ribs.

37. A display apparatus as recited in claim 31, wherein said display apparatus
5 further comprises:

an Electro Magnetic Interference (EMI) shield provided with or adjacent said frame.

38. A display apparatus as recited in claim 38, wherein said EMI shield
10 includes a plurality of openings.

39. A display apparatus, comprising:

a flat panel display that emits light in a forward direction and in a back direction when active; and

15 an outer shell for providing a housing for at least a rear portion of said display apparatus, said outer shell including a transparent portion through which a portion of the light emitted by said flat panel display in the back direction is able to pass, thereby illuminating the transparent portion when said flat panel display is active.

20 40. A display apparatus as recited in claim 39, wherein said display apparatus further comprises:

a light diffuser provided between said flat panel display and the translucent portion of said outer shell.

25 41. A display apparatus as recited in claim 40, wherein said light diffuser is a label.

42. A display apparatus as recited in claim 40, wherein the light passing through the transparent portion produces a multi-color illuminated design.

43. A display apparatus as recited in claim 42, wherein the multi-color illuminated design is defined by the transparent portion.

44. A display apparatus as recited in claim 42,
wherein said light diffuser is a label, and
wherein the multi-color illuminated design is defined on the label.

45. A display apparatus as recited in claim 39, wherein said light diffuser is able to substantially normalize the intensity of the light being emitted through the transparent portion across flat panel displays with substantially different characteristics in the light emitted in the back direction.

46. A display apparatus as recited in claim 39, wherein said display apparatus further comprises:

a light pipe that receives a portion of the light emitted in the back direction by said flat panel display, and directs the portion of the light receives to a predetermined destination for illumination of a feature when said flat panel display is active.

47. A display apparatus as recited in claim 46, wherein the feature is a design on a front portion of said display apparatus.

48. A display apparatus as recited in claim 47, wherein the feature is external to said display apparatus.

49. A display apparatus as recited in claim 48, wherein the feature illuminates a keyboard of a computer associated with said display apparatus.

50. A housing for a computer device, comprising:

5 a front shell;

a back shell coupled to said front shell to produce said housing, electrical components for the computer device being internal to said housing; and

10 a foam stiffener provided internal to said housing to substantially fill unused space internal to said housing, thereby providing stiffness to said housing.

51. A housing as recited in claim 50, wherein said foam stiffener is lightweight.

15 52. A housing as recited in claim 51, wherein said foam stiffener is Styrofoam.

53. A housing as recited in claim 50, wherein the surfaces of said foam stiffener are contoured to adjacent surfaces internal to said housing.

20 54. A stiffening system for providing distributed loading to a portable computer assembly, said stiffening system comprising:

a computer housing, said computer housing including a first member and a second member, said second member being coupled to said first member to form a volume therebetween and wherein said first member and said second member when coupled together form said computer housing;

a stiffener, said stiffener being disposed between said first member and said second member of said computer housing, said stiffener being configured to

substantially fill an unused portion of the volume between said first member and said second member wherein the outer surfaces of said stiffener respectively conform to the inner surfaces of the first and second member

5 55. A stiffening system as recited in claim 54, a laminate structure is formed from said first member, said second member and said stiffener which provide resistance to point pressure loading.

10 56. A stiffening system as recited in claim 54, wherein the inner peripheral surface of said first member has a complex geometry.

57. A stiffening system as recited in claim 54, wherein said stiffener is formed from foam.

15 58. A stiffening system as recited in claim 57, wherein said foam is packaging foam.

59. A stiffening system as recited in claim 54, wherein said stiffener further includes a cavity.

20

60. A stiffening system as recited in claim 59, wherein said cavity is configured to provide clearance for internal circuitry or parts in said portable computer assembly.

25 61. A stiffening system as recited in claim 59, wherein said cavity is a weight reduction cavity.

62. A stiffening system as recited in claim 57, wherein said foam is formed from a material selected from the group consisting essentially of polyurethane, expanded polystyrene, expanded polypropylene and expanded polyethylene.

5 63. A stiffening system as recited in claim 54, wherein said stiffener further includes protrusions and depressions for filling empty spaces in said first member and said second member.

64. A stiffening system as recited in claim 54, wherein said first member is an
10 LCD display screen housing of said portable computer assembly.

65. A stiffening system as recited in claim 54, wherein said computer housing is a base housing of said portable computer assembly.

15 66. A computer system, comprising:

an antenna, said antenna being configured to transmit or receive RF signals; and

a computer housing, said computer housing being configured to enclose said antenna such that said antenna is entirely contained internal to said
20 computer housing and is operable while being internal to said computer housing without having to extend any portion of said antenna outside said computer housing.

67. A computer system as recited in claim 66,
25 wherein said computer housing includes at least a display housing, said display housing including at least a display screen, and
wherein said antenna is provided internal to said display housing.

68. A computer system as recited in claim 67,
 wherein said antenna has first and second antenna poles, and
 wherein said display housing has first and second sides, the first antenna
 pole being placed at the first side and the second antenna pole being placed at
 5 the second side.

69. A computer system as recited in claim 68, wherein said display housing
 includes first and second recesses which respectively receive therein the first and
 second antenna poles.

70. A computer system as recited in claim 69, wherein the first and second
 recesses are separated from said display screen by at least a predetermined
 amount.

71. A computer system as recited in claim 68, wherein the first and second
 antenna poles are separated from any metal surfaces within said display housing
 by at least a predetermined amount.

72. A computer system as recited in claim 68, wherein the first and second
 20 antenna poles are disposed at an outer peripheral region of said display housing
 yet internal to said display housing and substantially invisible external to said
 display housing.

73. A computer system as recited in claim 68, wherein said computer system
 25 is a portable computing device.

74. A computer system as recited in claim 66, wherein said computer system
 is a portable computing device.

75. A computer system as recited in claim 66, wherein antenna comprises:

an antenna cable having first and second conductors;

an outer conductor, said outer conductor being operatively coupled to
5 said second conductor of said antenna cable;

an inner conductor, said inner conductor being operatively coupled to
said first conductor of said antenna cable; and

an antenna housing, said antenna housing being disposed around the
outer periphery of said outer conductor and said inner conductor, and wherein
10 said antenna housing maintains a fixed separation between said outer conductor
and said antenna cable.

76. An antenna device for transmitting and receiving RF for use by a
computer, said antenna device comprising:

15 an antenna cable having first and second conductors;

an outer conductor, said outer conductor being operatively coupled to
said second conductor of said antenna cable;

an inner conductor, said inner conductor being operatively coupled to
said first conductor of said antenna cable; and

20 an antenna housing, said antenna housing being disposed around the
outer periphery of said outer conductor and said inner conductor, and wherein
said antenna housing maintains a fixed separation between said outer conductor
and said antenna cable.

25 77. An antenna device as recited in claim 76, wherein said antenna housing
is formed from polycarbonate.

78. An antenna device as recited in claim 76, wherein said outer conductor is formed from copper.

79. An antenna device as recited in claim 76, wherein said antenna cable is a
5 coaxial cable.

80. An antenna device as recited in claim 76, wherein an outer peripheral surface of said antenna housing is surrounded by shrink tubing.

15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100

DISPLAY HOUSING FOR COMPUTING DEVICE

ABSTRACT OF THE DISCLOSURE

An improved housing for a computing device is disclosed. The improved
 5 housing can have one or more of the following aspects. A first aspect of the
 invention pertains to a computer housing having a logo or other symbol that can
 be illuminated using light from the backside of a display panel. A second aspect
 of the invention pertains to a suspended frame is able to support a display panel
 within a display housing. A third aspect of the invention pertains to a computing
 10 device provided with an internal antenna. A fourth aspect of the invention
 pertains to a stiffener for a computer housing so as to increase the rigidity and
 strength of the computer housing. A fifth aspect of the invention pertains to a
 housing having a logo, symbol or other device that can be illuminated using
 light from the backside of a display panel. A sixth aspect of the invention
 15 pertains to a lid for a computing device, such as a portable computer, that is
 provided with a translucent housing.

20

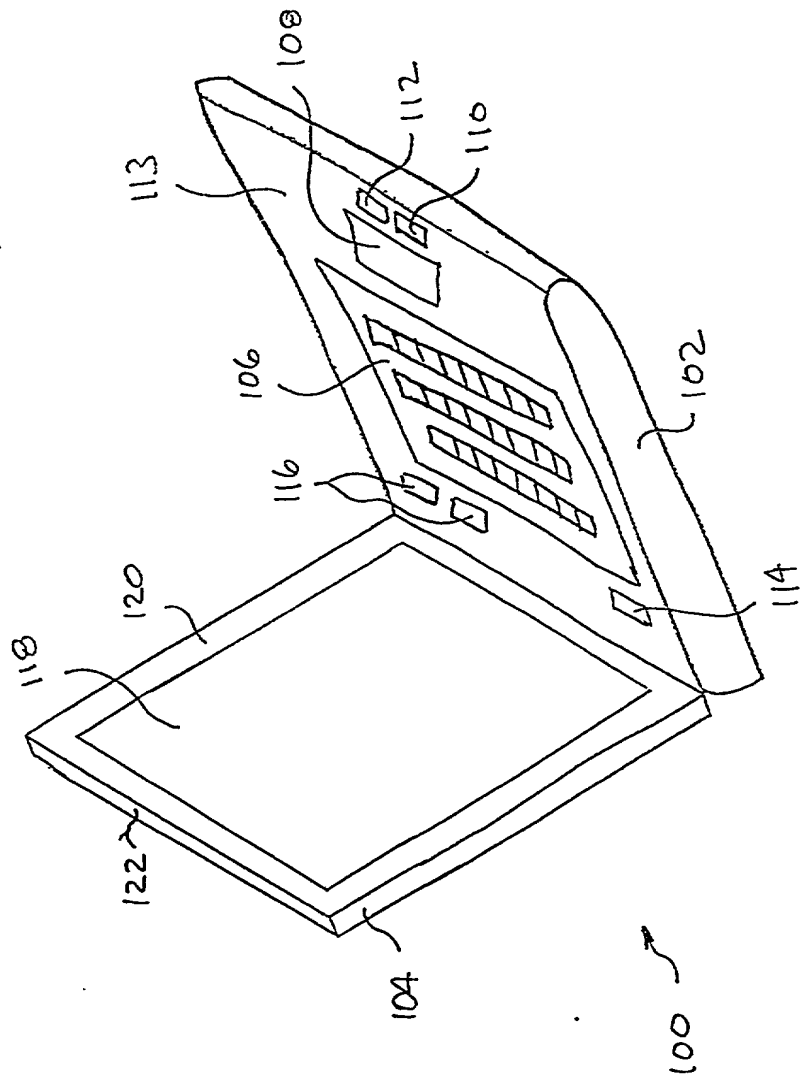


FIG. 1

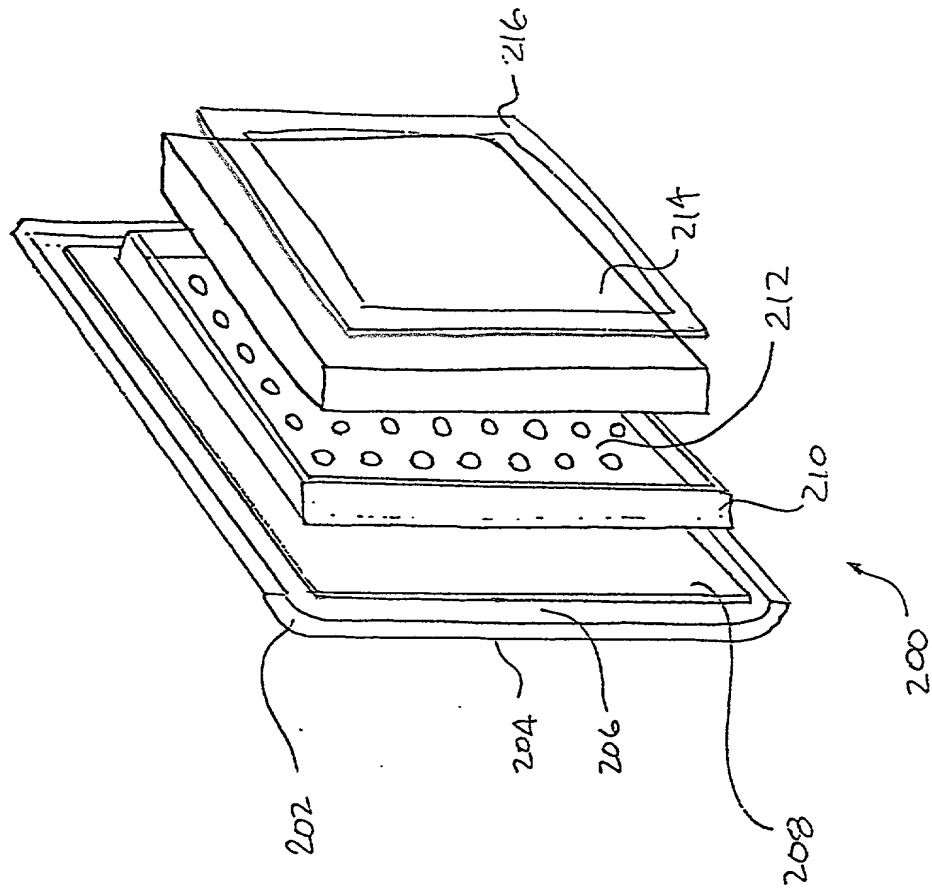


FIG. 2

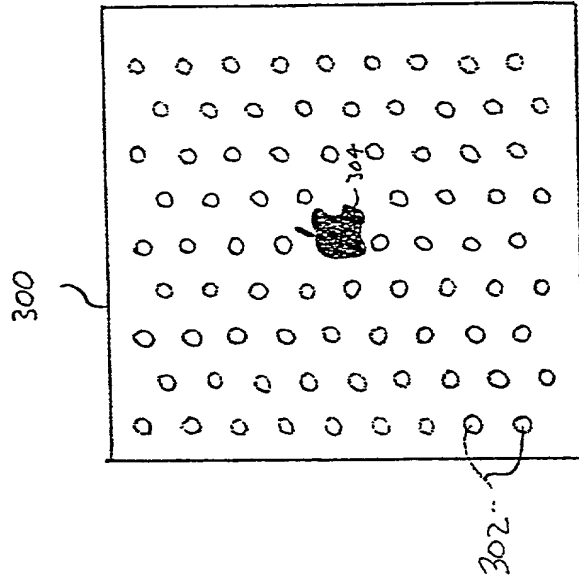


FIG. 3A

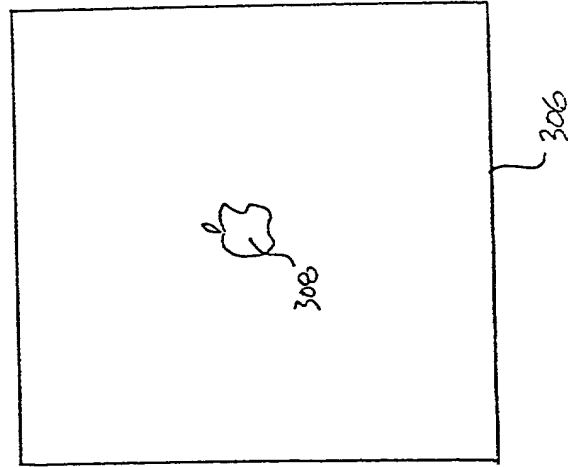


FIG. 3B

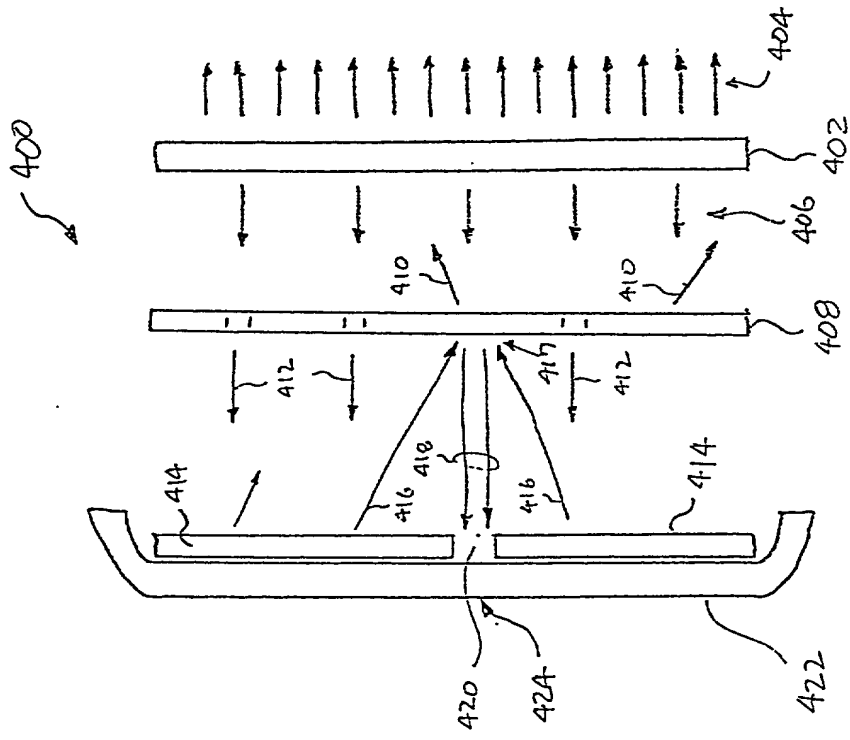


FIG. 4

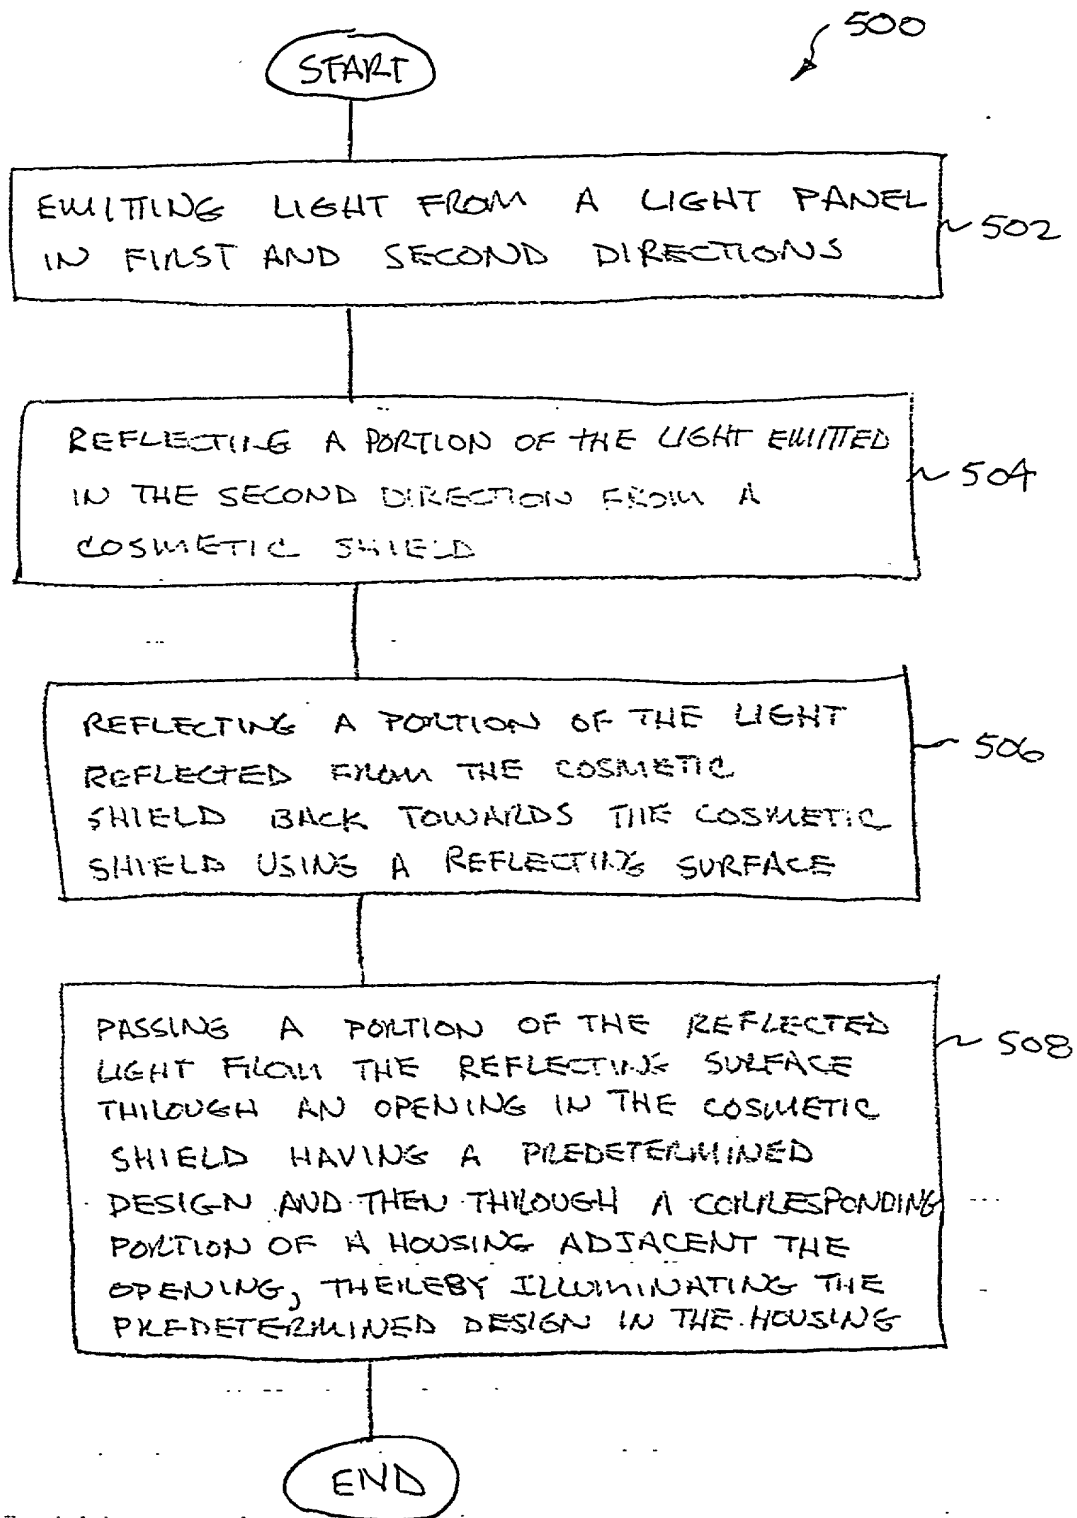


FIG. 5

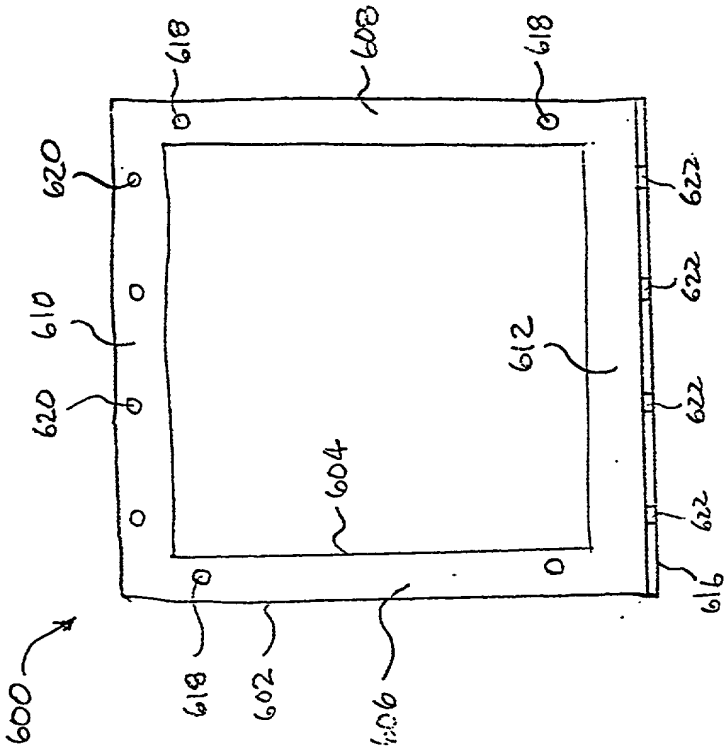


FIG. 6A

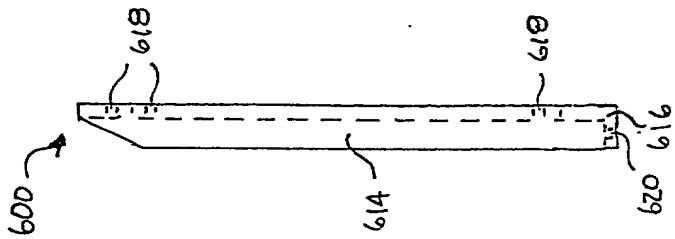


FIG. 6B

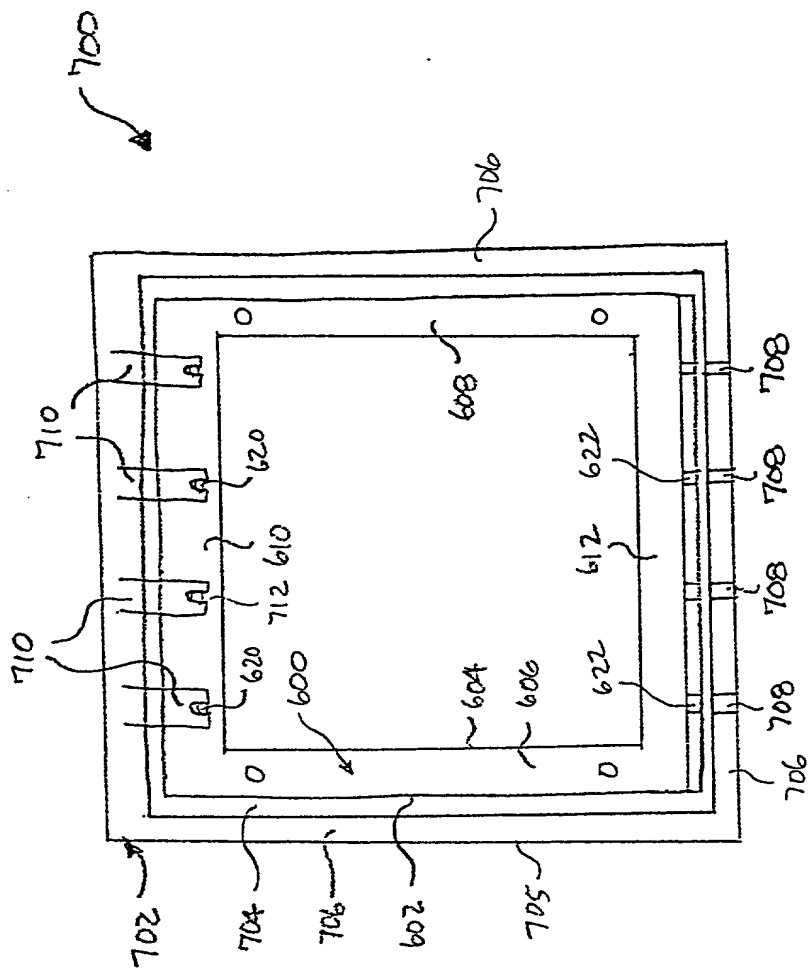


FIG. 7

66E060"ST668E60

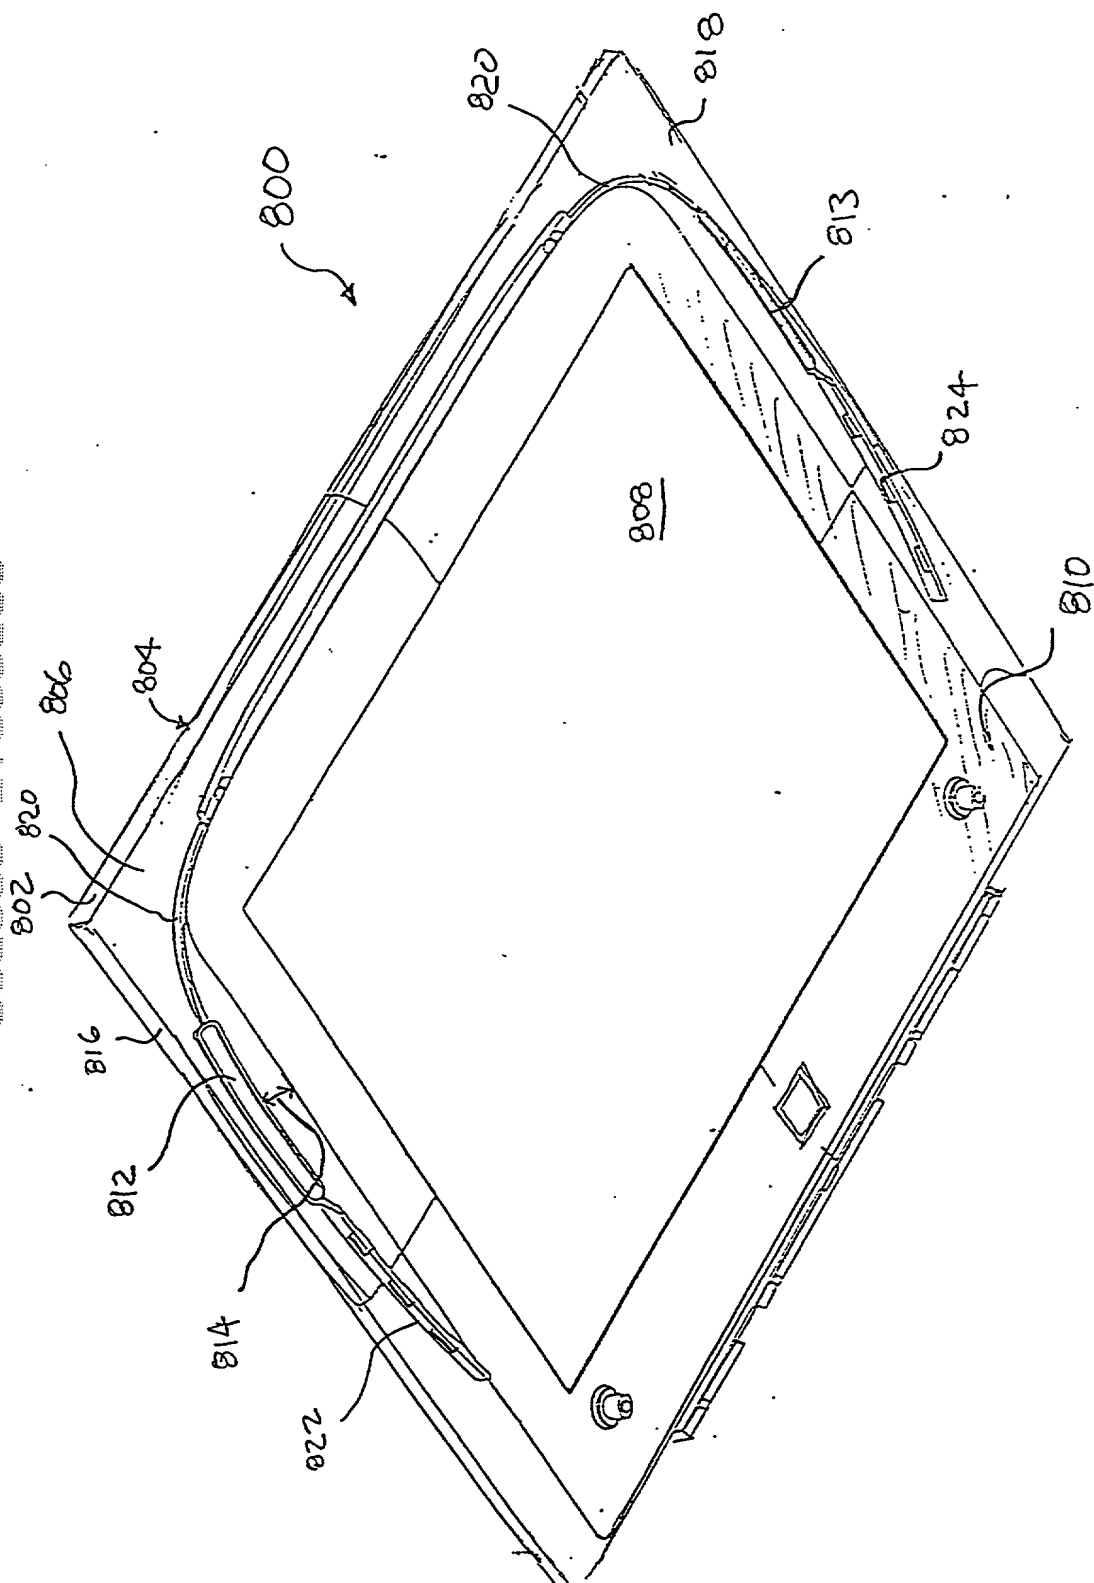
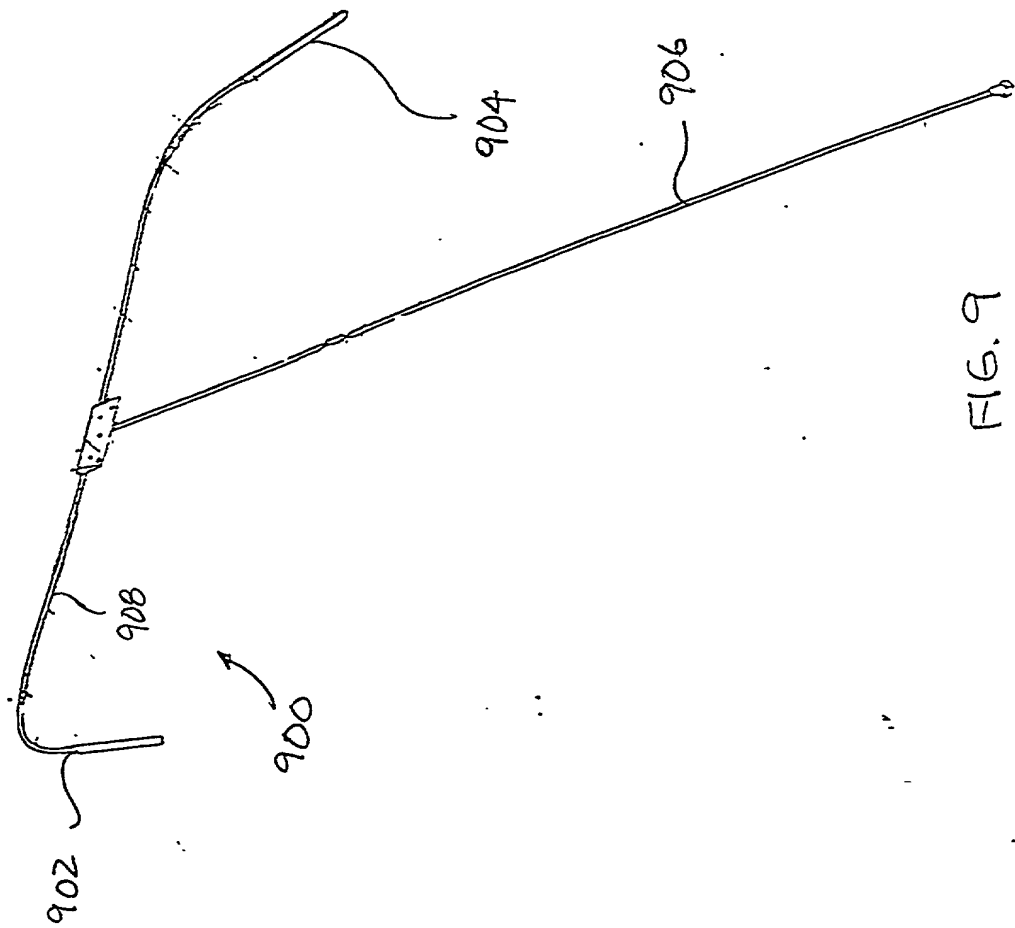


FIG. 8



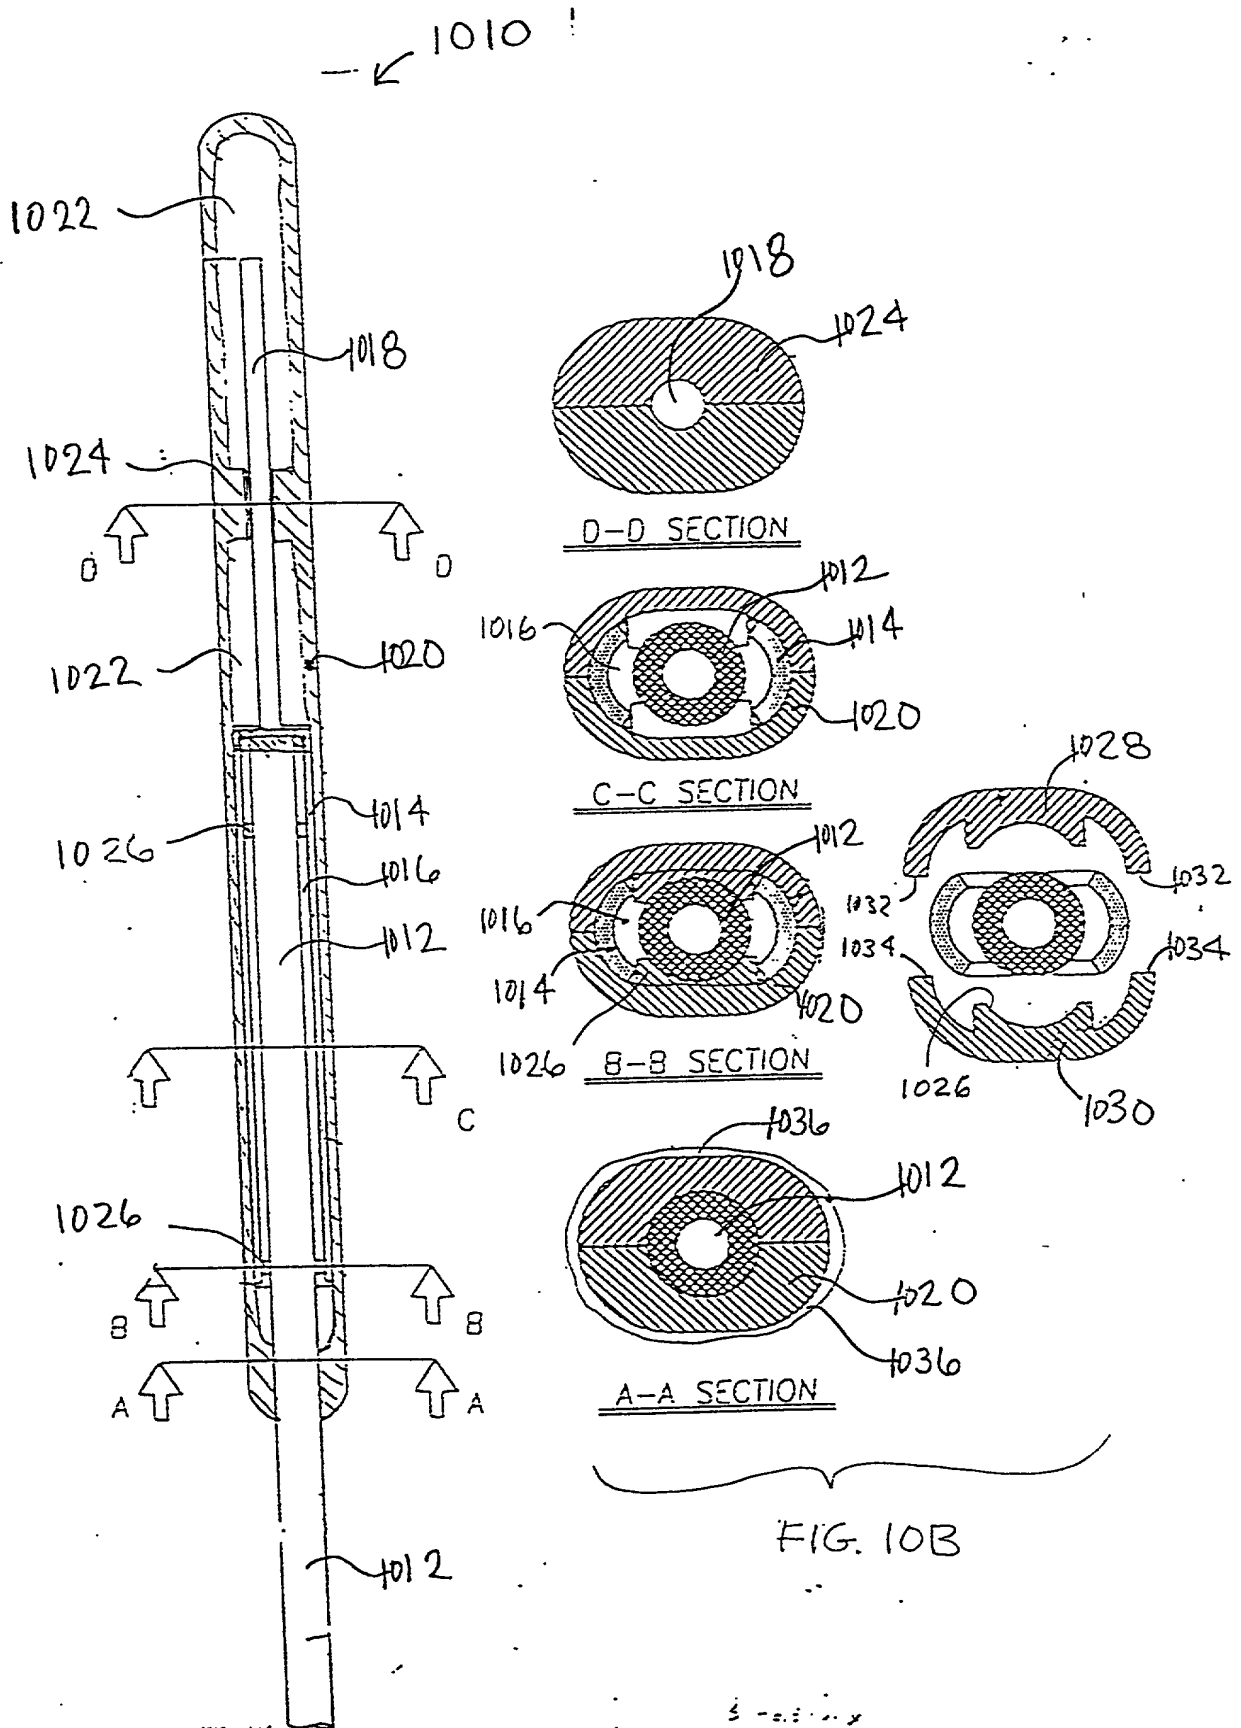


FIG. 10A

1110 ↗

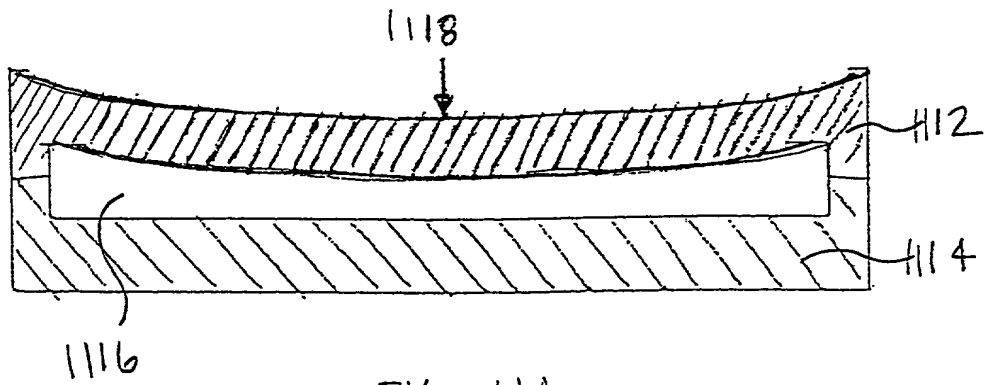


FIG. 11A

1110 ↗

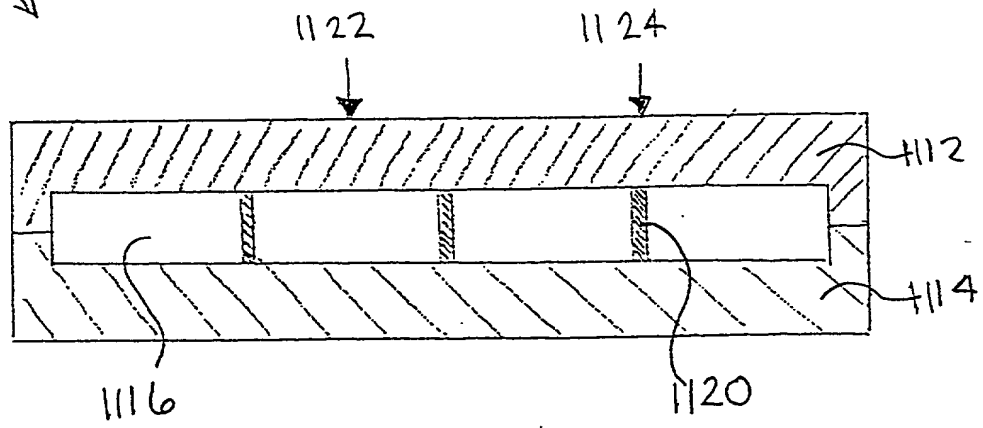


FIG. 11B

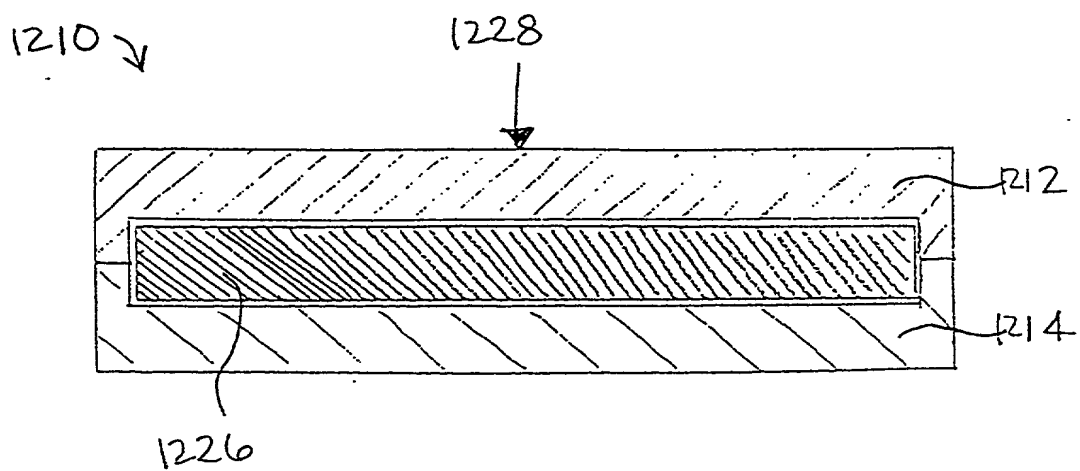


FIG. 12

	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2433	2434	2435	2436	2437	2438	2439	2440	2441	2442	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

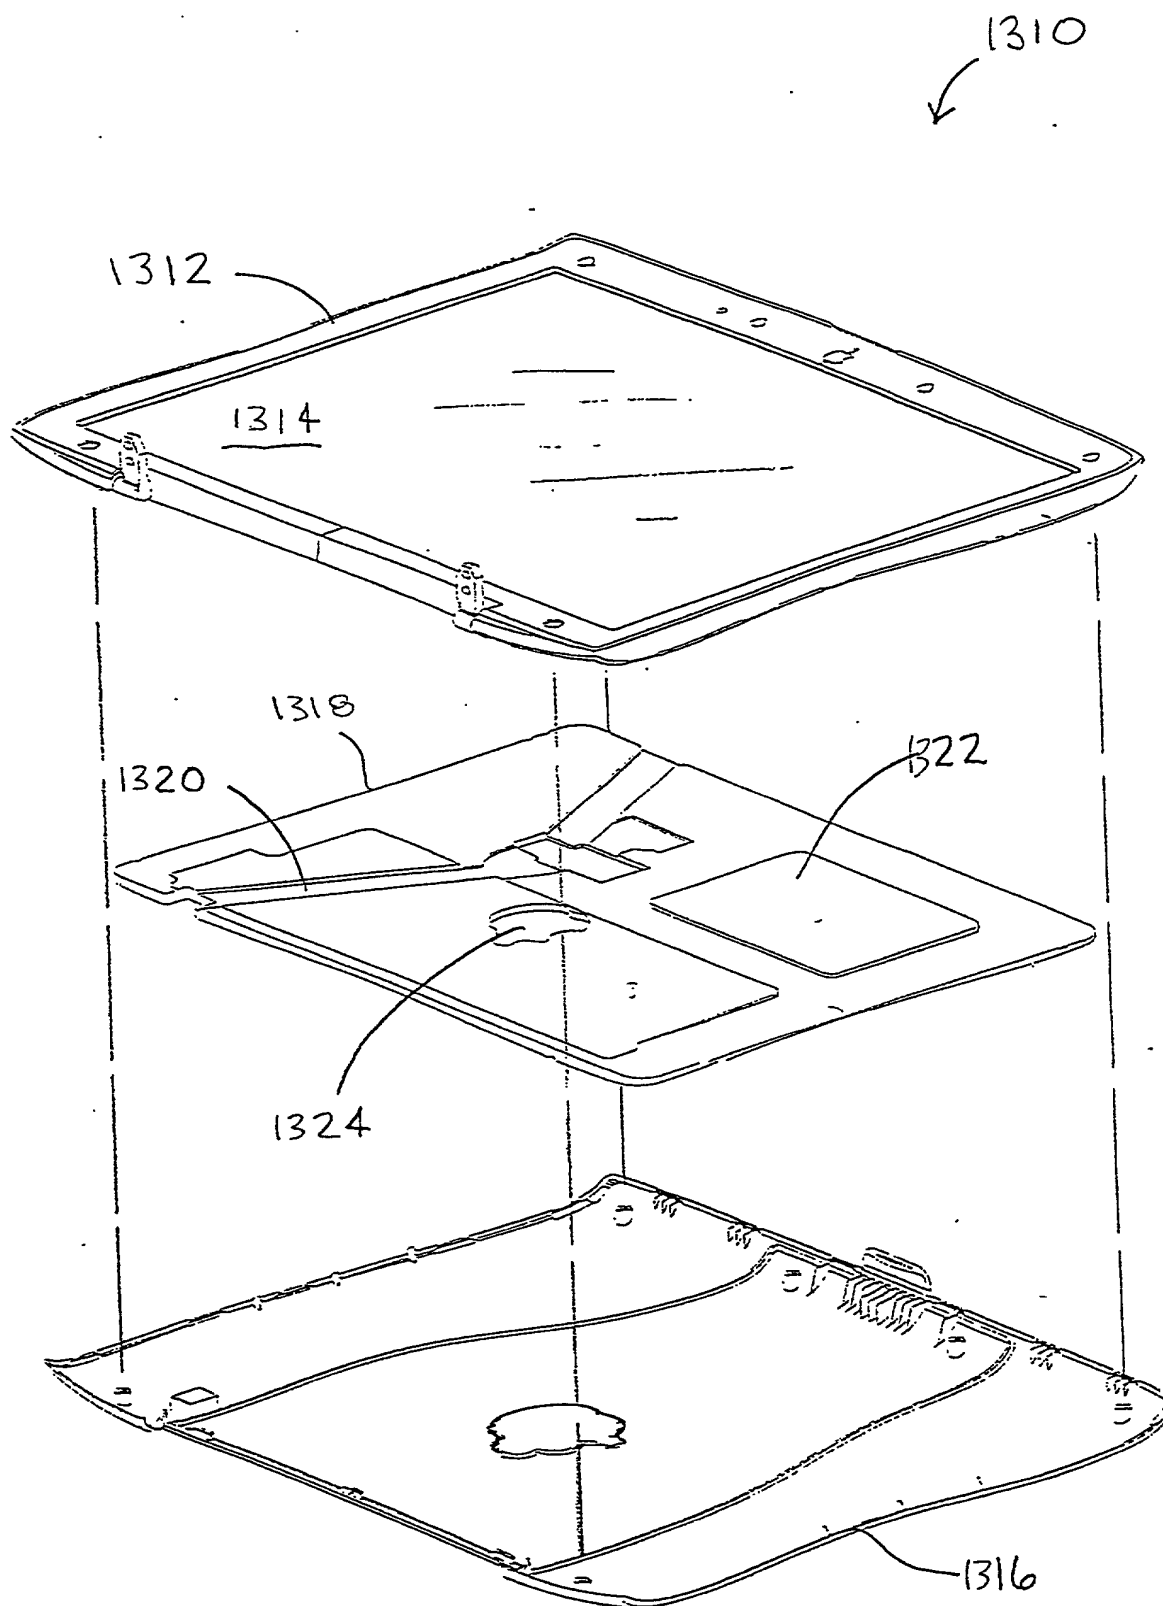


FIG. 13

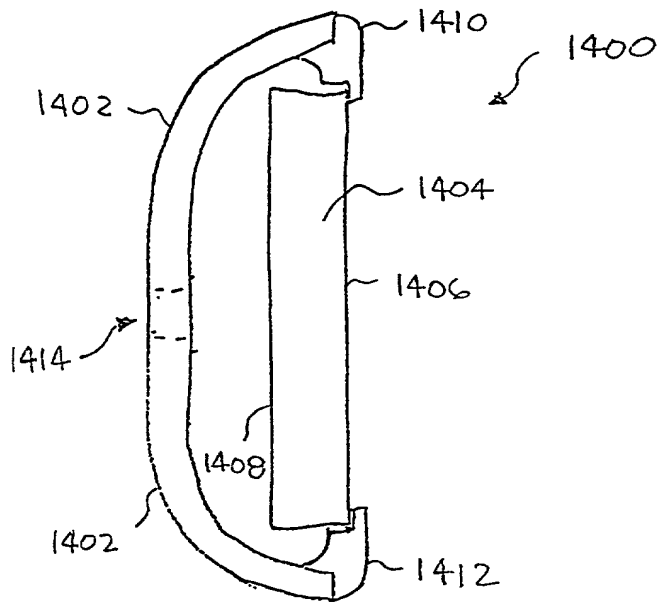


FIG. 14A

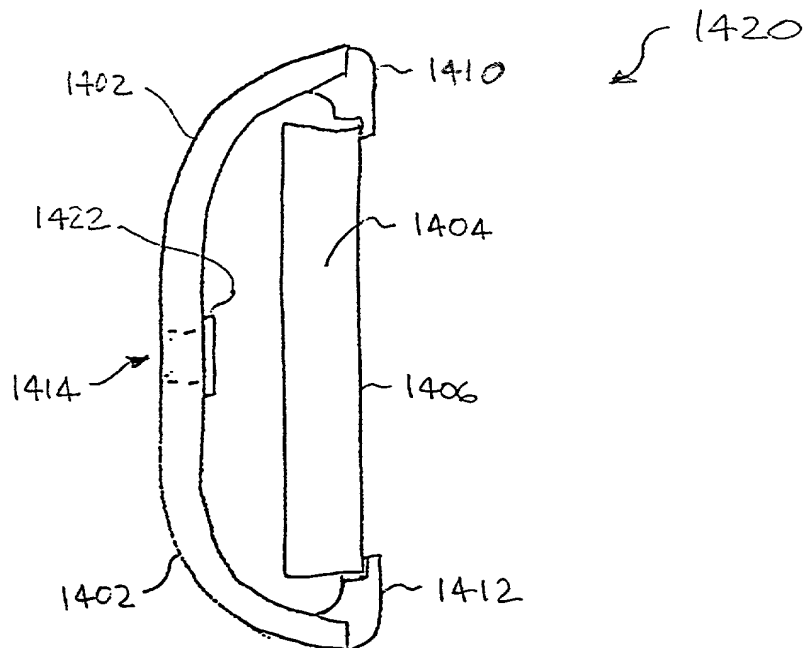


FIG. 14B

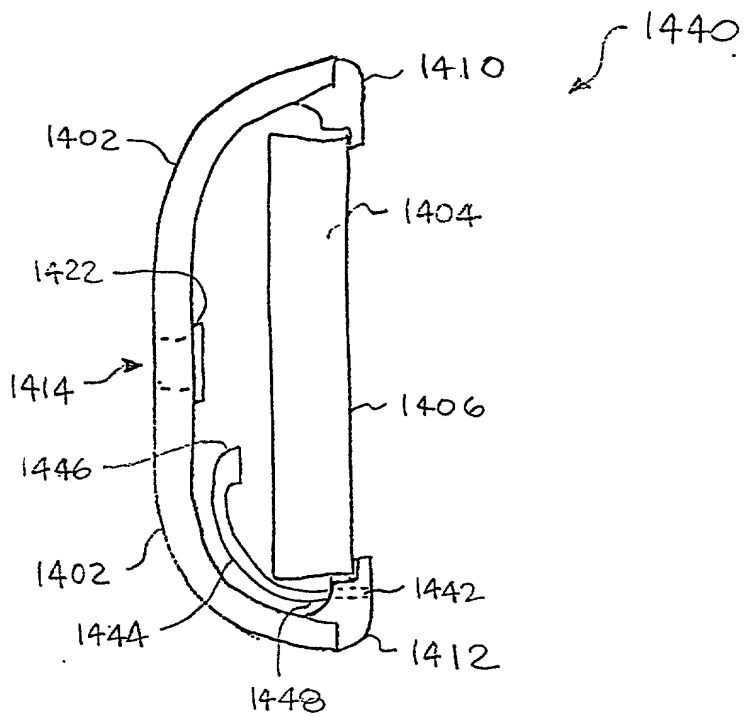


FIG. 14C

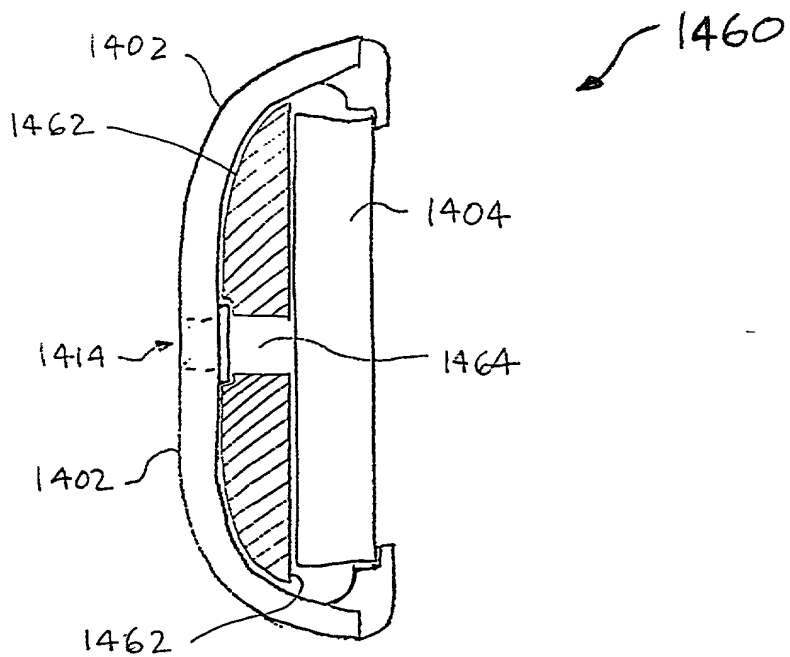


FIG. 14D

DECLARATION AND POWER OF ATTORNEY FOR ORIGINAL U.S. PATENT APPLICATION

Attorney's Docket No. APL1P193/P2369

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **DISPLAY HOUSING FOR COMPUTING DEVICE** the specification of which,

(check one)

1. ☒ is attached hereto.
2. ☐ was filed on _____ as
U.S. Application No. _____
and was amended on _____
3. ☐ was filed on _____ as
International PCT Application No. _____
and was amended on _____

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, CFR § 1.56.

Prior Foreign Application(s)

I hereby claim foreign priority benefits under Title 35, United States code, § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:

(Application No.)	(Country)	(Filing Date)	Priority Benefits Claimed? Yes ___ No ___
_____	_____	_____	Yes ___ No ___
_____	_____	_____	Yes ___ No ___

Provisional Application(s)

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

<u>60/134,082</u>	<u>MAY 14, 1999</u>
(Application No.)	(Filing Date)
_____	_____
(Application No.)	(Filing Date)

Prior U.S. Application(s)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

_____ (Application No.)	_____ (Filing Date)	_____ (Status - patented, pending, abandoned)
----------------------------	------------------------	--

_____ (Application No.)	_____ (Filing Date)	_____ (Status - patented, pending, abandoned)
----------------------------	------------------------	--

Power of Attorney

And I hereby appoint the law firm of **Beyer & Weaver, LLP** and all practitioners who are associated with the Customer Number 022434 as my principal attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Direct Correspondence To:

Customer Number: 022434

BEYER & WEAVER, LLP
P.O. Box 61059
Palo Alto, CA 94306



Direct Telephone Calls To:

C. Douglass Thomas at telephone number (650) 493-2100

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Typewritten Full Name of

Sole or First Inventor: Lawrence LAM

Citizenship: USA

Inventor's signature: *Lawrence Lam*

Date of Signature: 8/25/99

Residence: (City) San Jose

(State/Country) CA/US

Post Office Address: 6313 Tucker Drive, San Jose, California 95129

Full Name of Second Joint

Inventor (if any): Jory BELL

Citizenship: USA

Inventor's signature: *J Bell*

Date of Signature: 9/1/99

Residence: (City) San Francisco

(State/Country) CA/US

Post Office Address: 801 Minnesota Street, #8, San Francisco, California 94107

Full Name of Third Joint

Inventor (if any): Chris J. STRINGER

Citizenship: UK

Inventor's signature: 

Date of Signature: 9/1/99

Residence: (City) Pacifica

(State/Country) CA/US

Post Office Address: 243 Olympian Way, Pacifica, California 94044

Full Name of Fourth Joint

Inventor (if any): Roy RICCOMINI

Citizenship: USA

Inventor's signature: 

Date of Signature: 8/25/99

Residence: (City) Saratoga

(State/Country) CA/US

Post Office Address: 12602 Cambridge Drive, Saratoga, CA 95070

658060" 5T66360